



Anyway Floor Co., Ltd.

Add: No.110, East Changhong Road,
Wujin District, Changzhou, Jiangsu, China

Contact Number: +86-18961419868

Email: tony@czanyway.com

Web: www.anywayflooring.com

What is WPC ?

WPC (Wood Plastic Composite) is extruded thermoplastic composite made of polyethylene and natural wood fiber. Wood plastic composite is more environmentally friendly and requires less maintenance than the alternatives of solid wood. WPC is resistant to cracking and splitting, it is a material that can be molded with or without simulated wood grain details.



Strength and Durability

Unlike timber, our boards retain their strength and durability throughout their life.



No Rotting or Warping

A unique material composition resistant to the damaging effects of moisture build-up.



Eco-Friendly

A long-lasting material composed of a blend of recycled plastic and wood fibers.



No Splintering

The material composition ensures long-term safety and assurance.



25 Year Residential Warranty

High-quality, long-lasting products with a 25-year warranty.



Very Low Maintenance

All our boards are hard-wearing and easy to maintain.

100% Waterproof:

Moisture-proof,
Anti-mold



Fire Retardant:




















Effective flame
retardant,
Self-extinguishing
away from the fire.

Card Slot Design:

Easy to install
Easy to maintain



Indoor WPC Wall Panel Collections

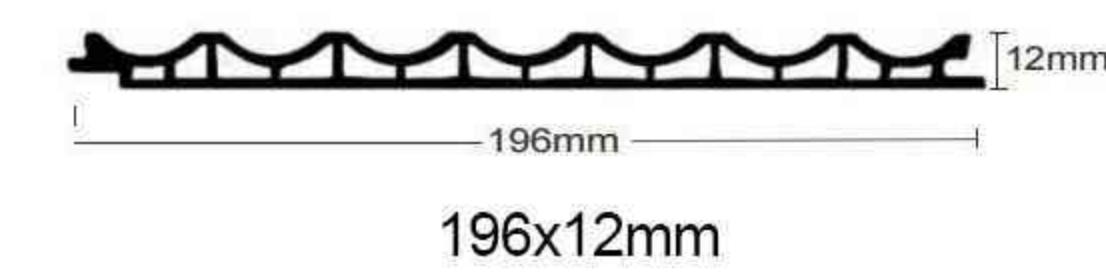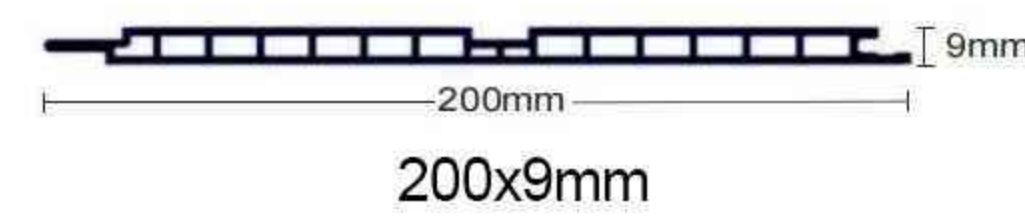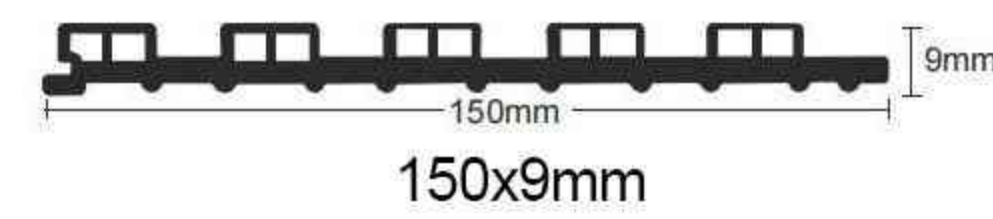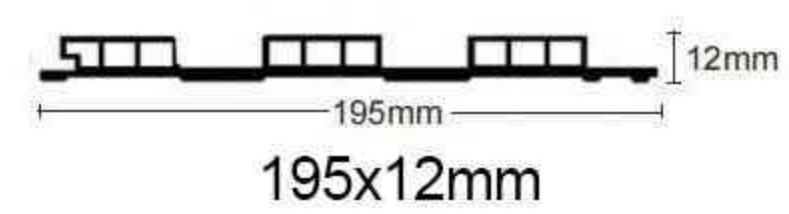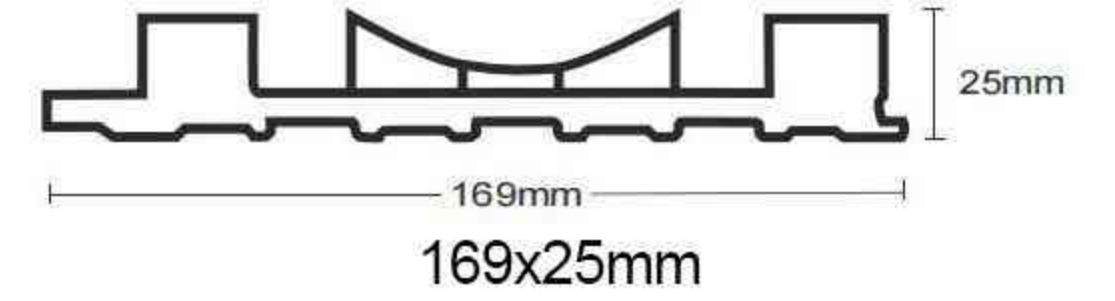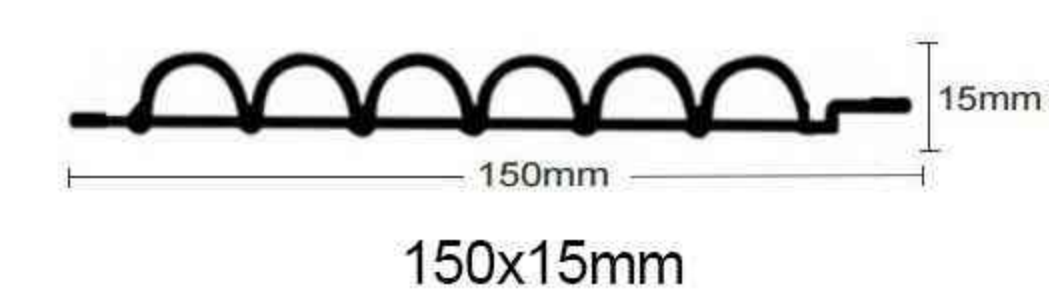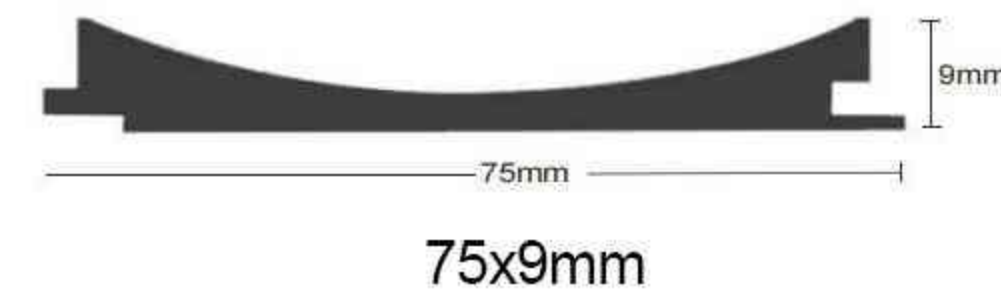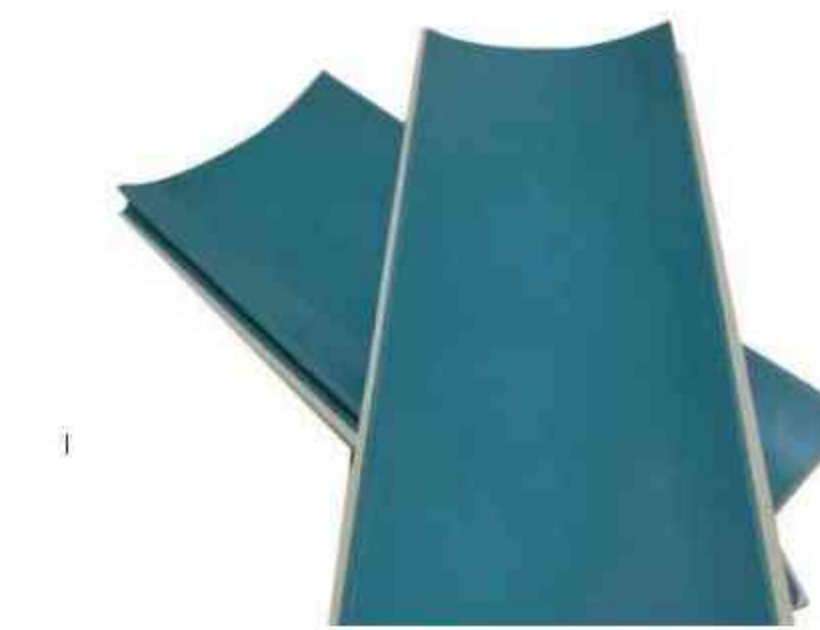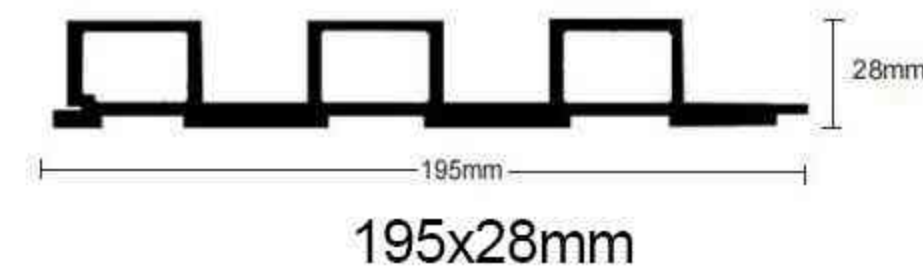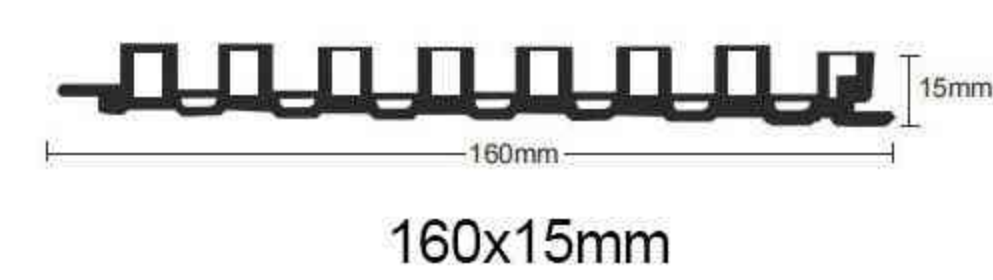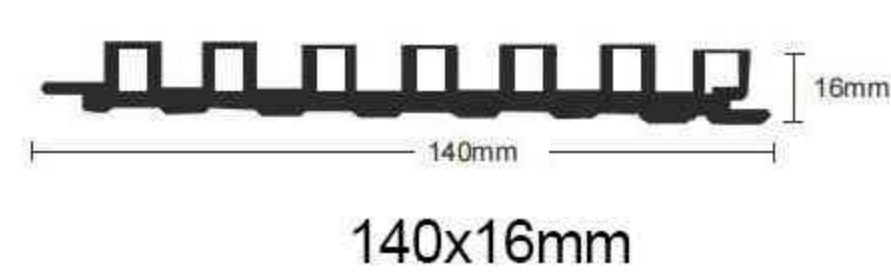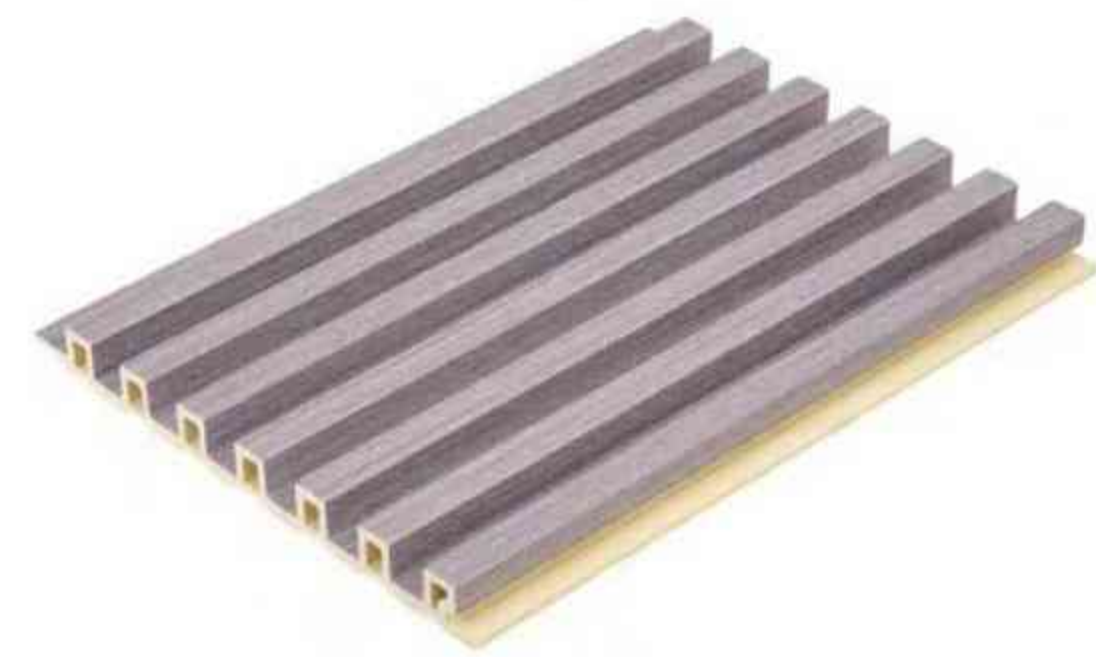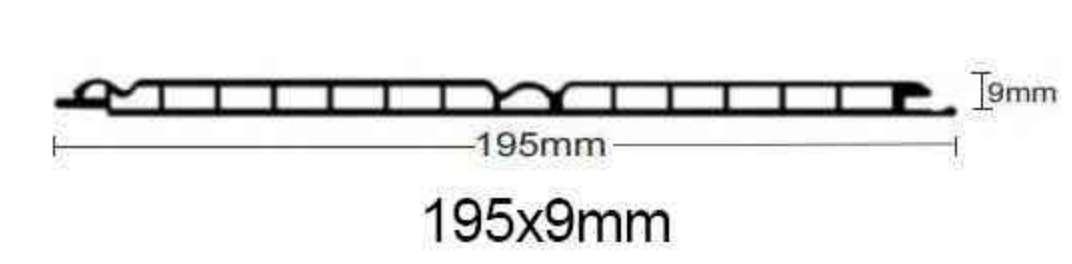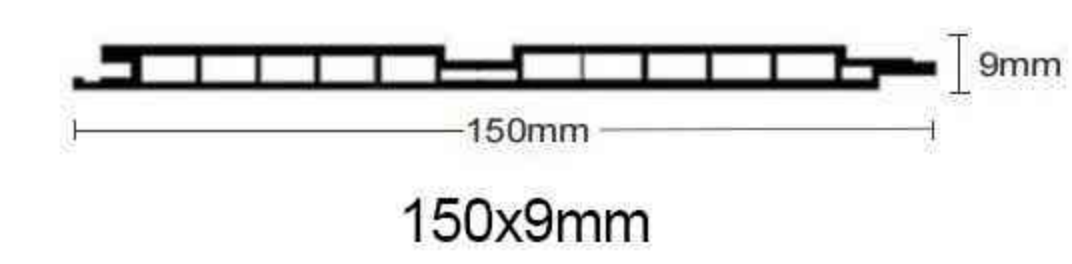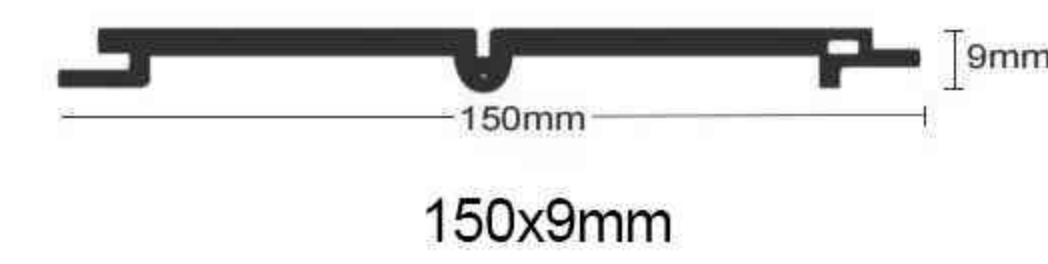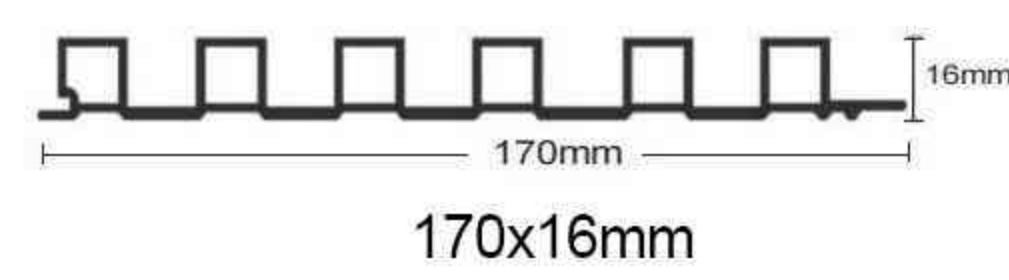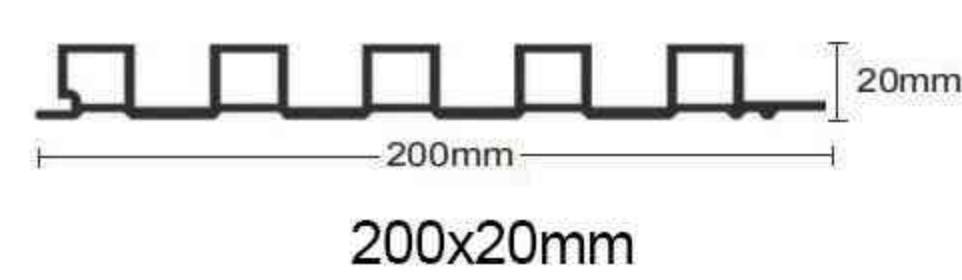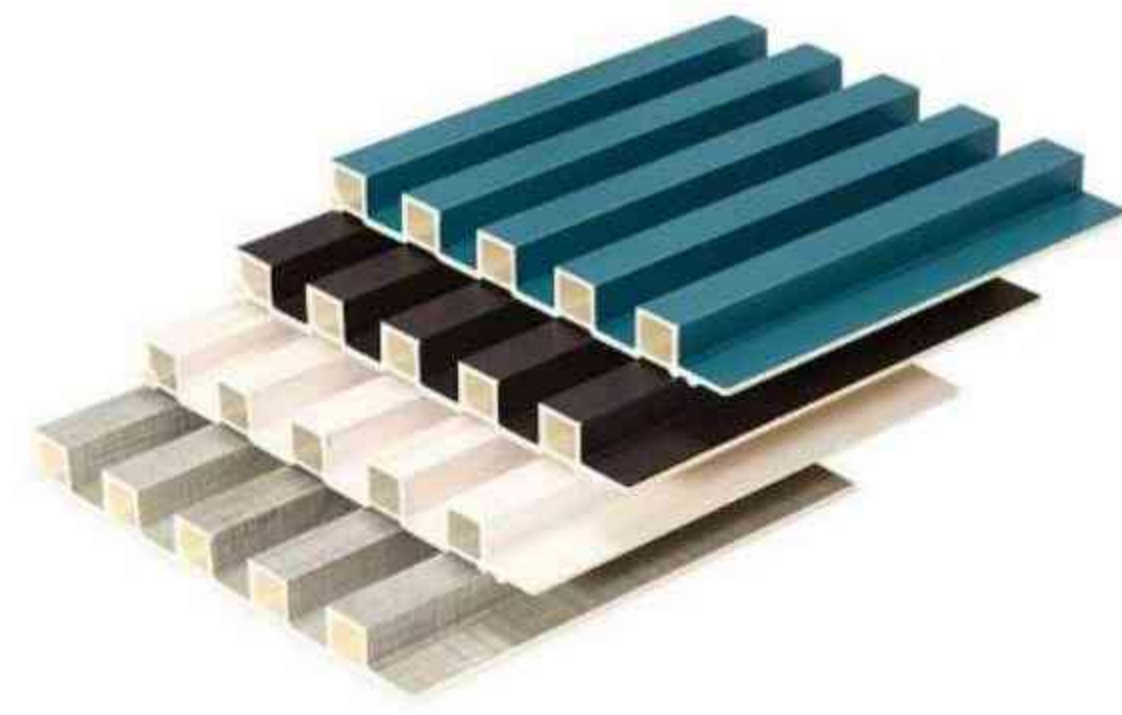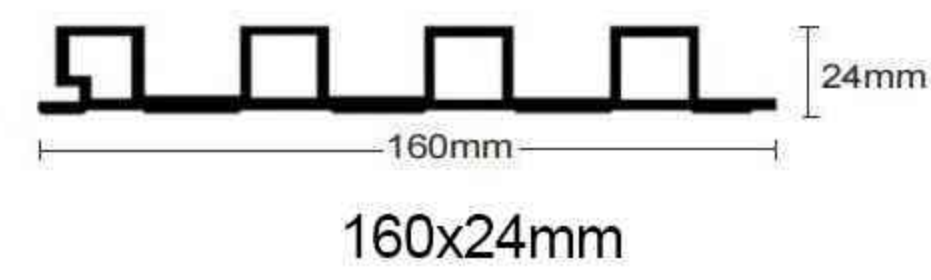

DETAILS AND FEATURES



01.

SOUND CONSTRUCTION

Selection of natural materials to improve toughness and impact resistance, more wear resistance



03.

WATER AND MOISTURE RESISTANCE

No mildew, no moisture, no deformation

02.

EASY TO INSTALL


Horizontal wireless splicing, easy and convenient, save time




04.

FIRE AND FLAME RETARDANT

Effective flame retardant, safe to use. It can be used in hotels, KTV and other scenes with high fire protection requirements

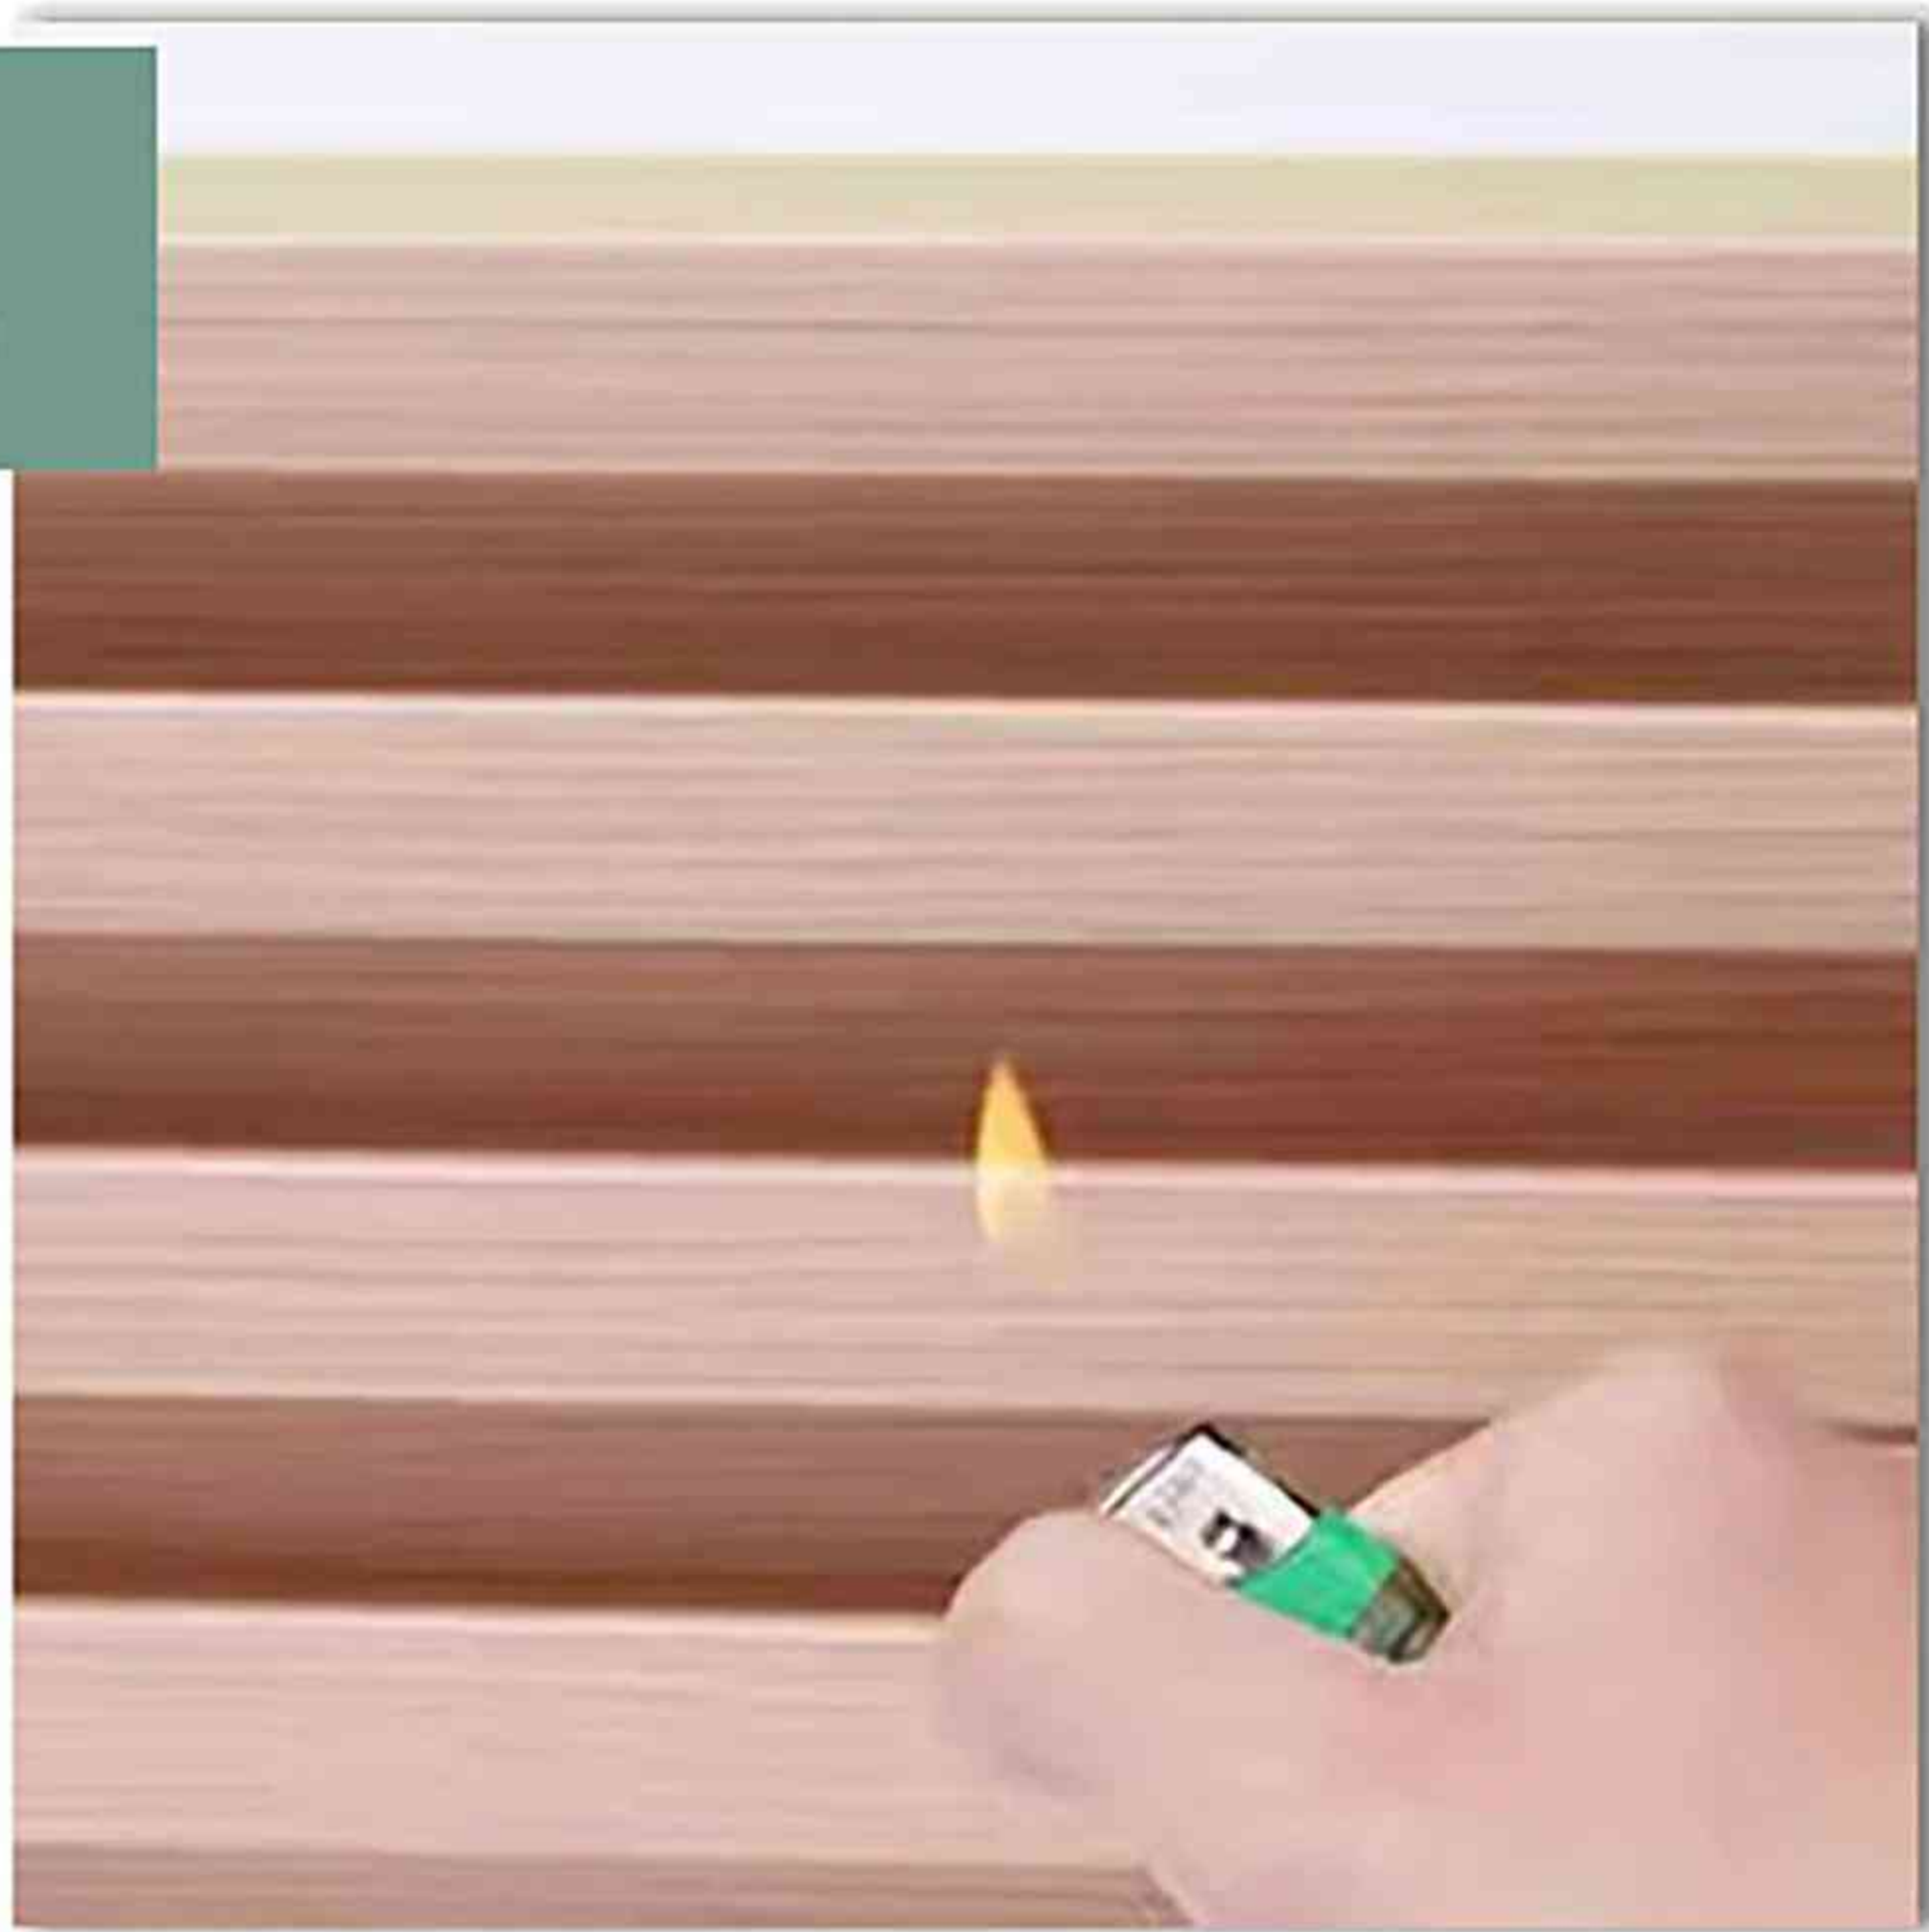


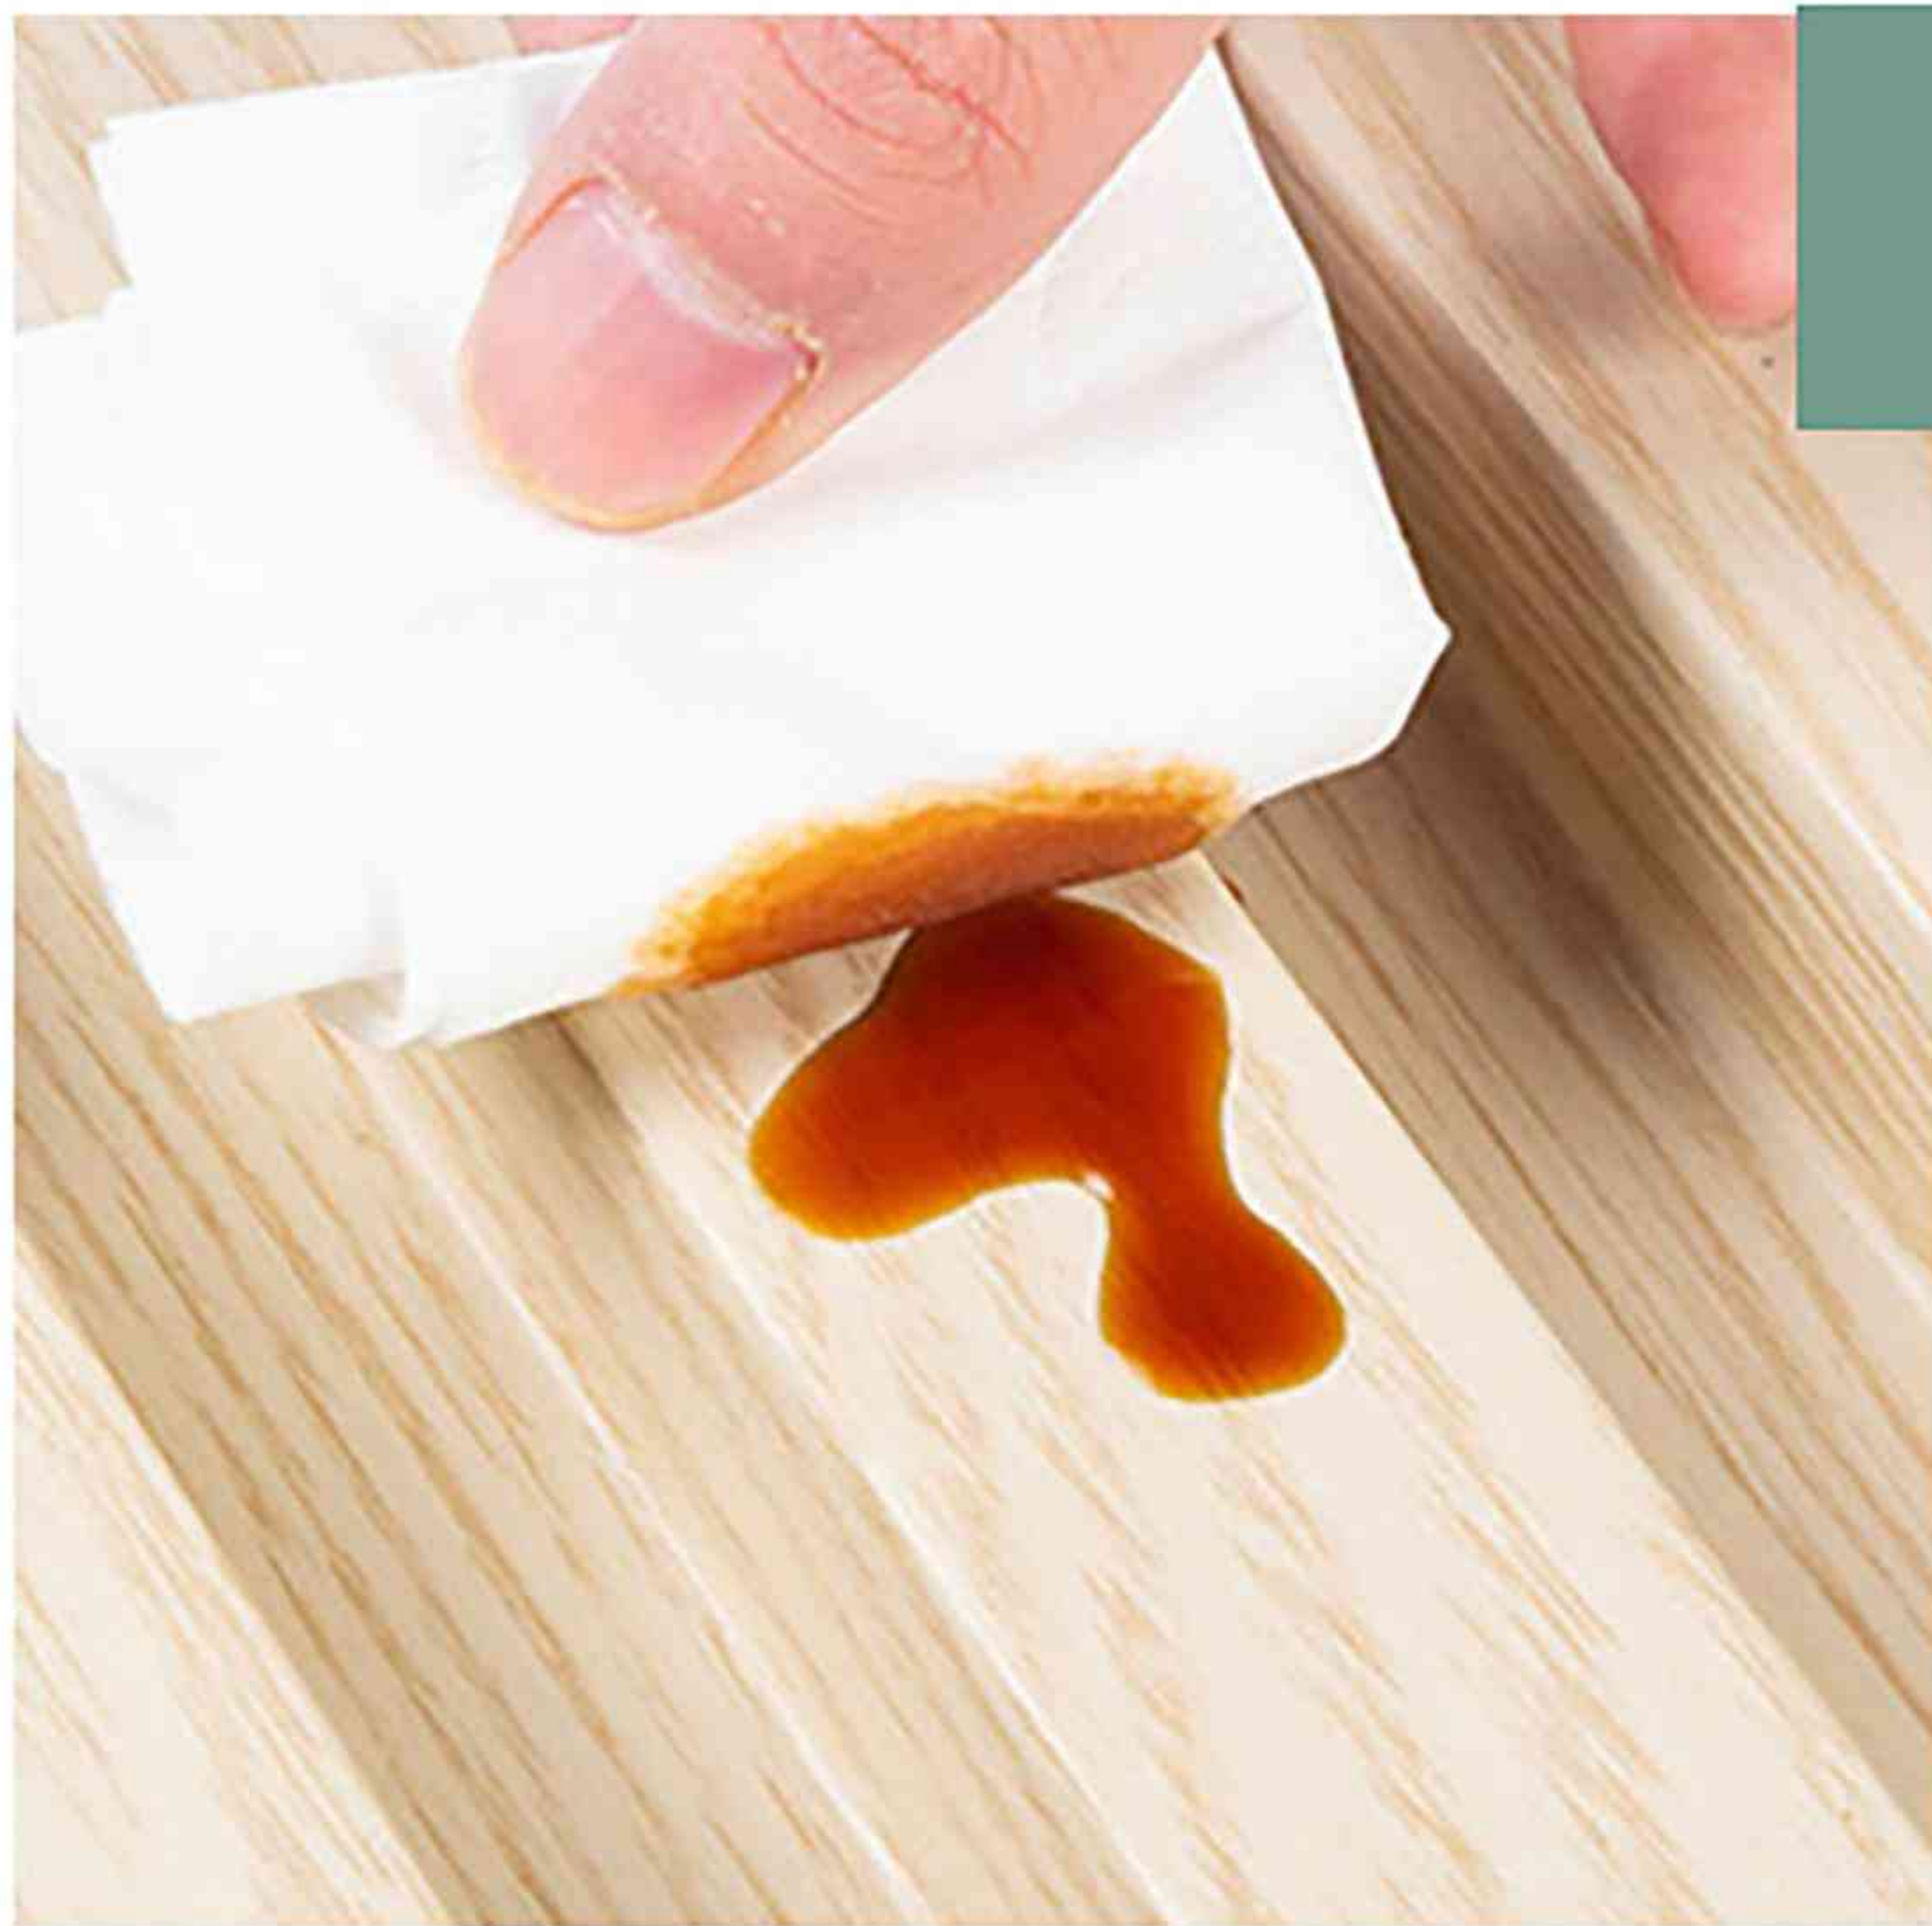

05.

CLEAN EASILY

Smooth surface is not easy to stain, a wipe is clean

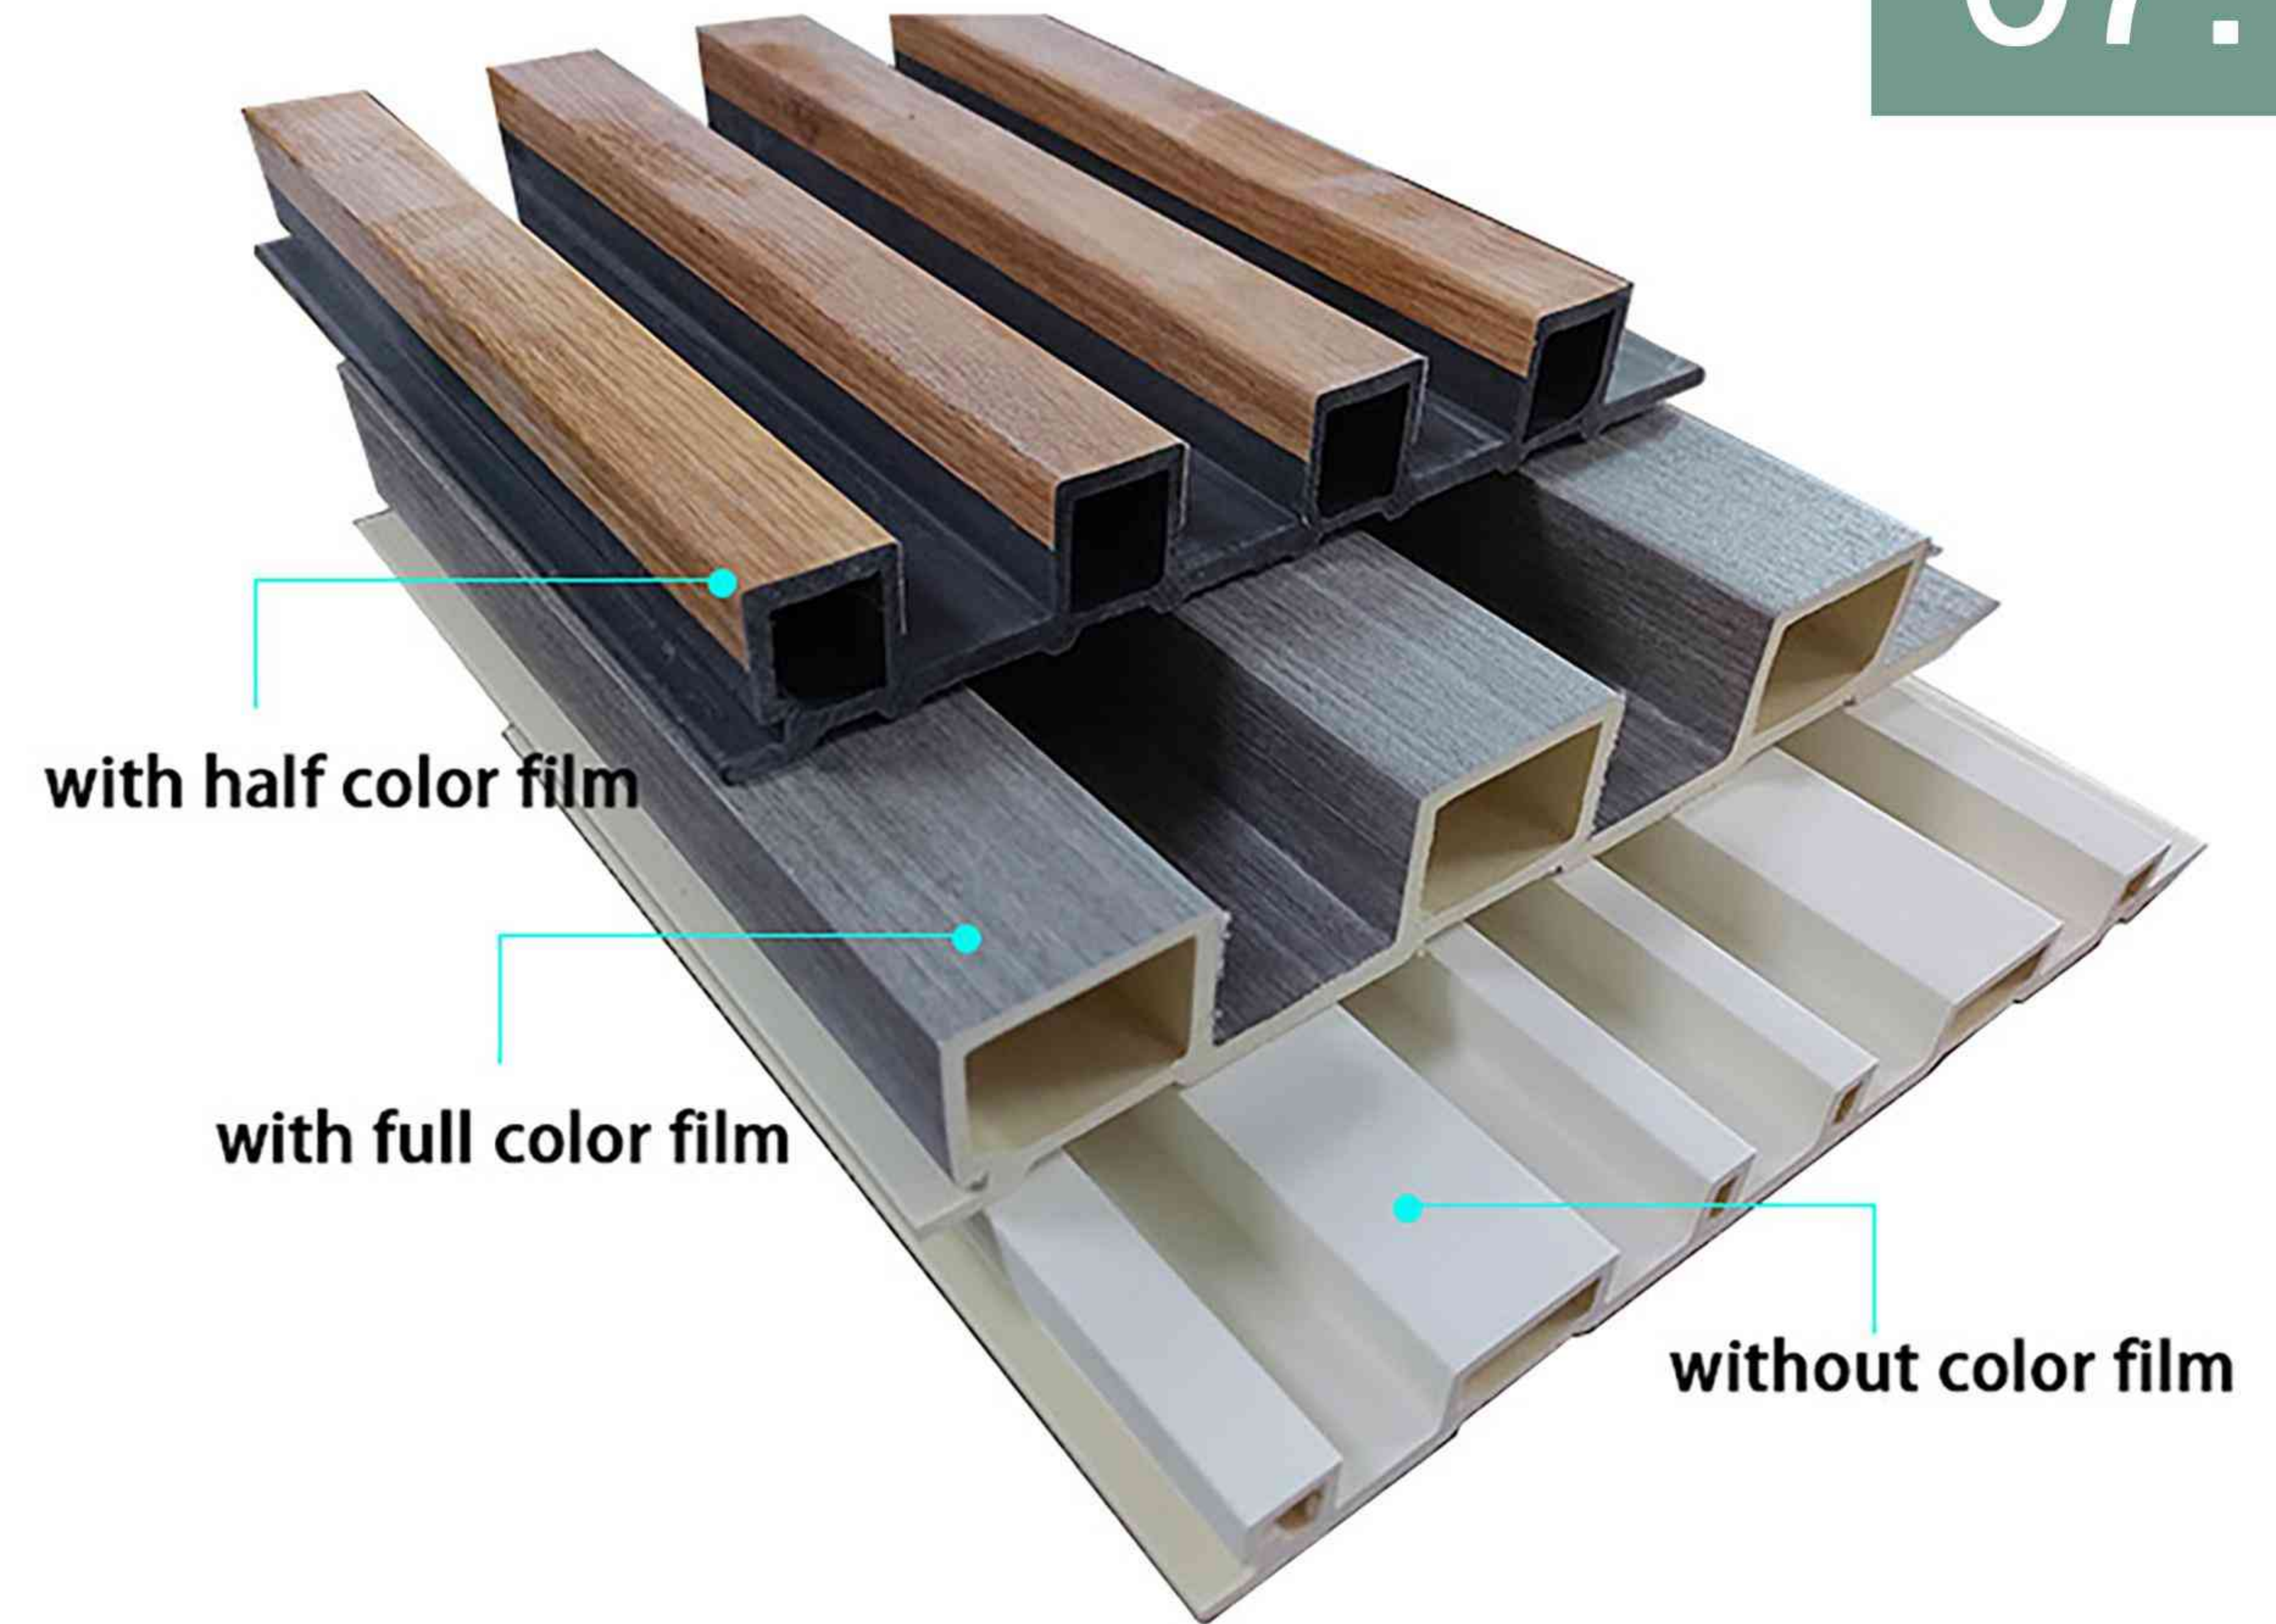

07.

06.

VARIOUS COLORS AND STYLES


Scientific color matching system, a variety of structural colors let you choose, one time to pick satisfactory goods



Product Details



Specification

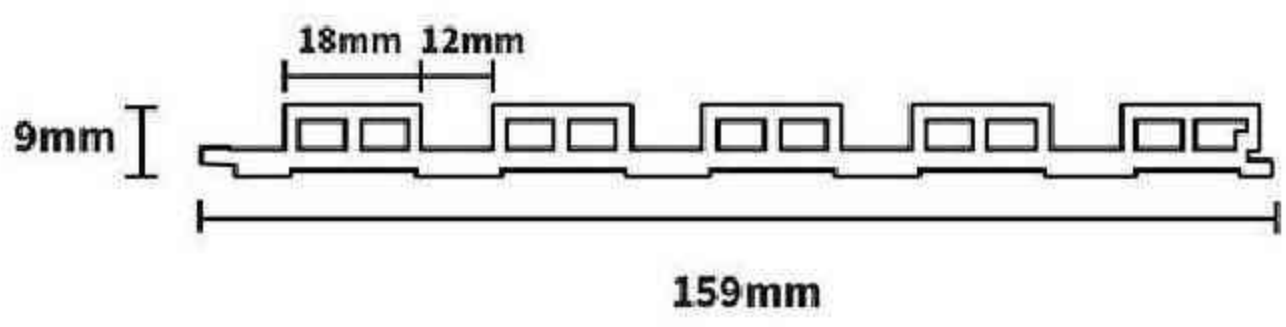

▲ Effect Picture

▼ Finished Design



Golden Oak



Fancy Walnut





Gray



Red Apple



Specification

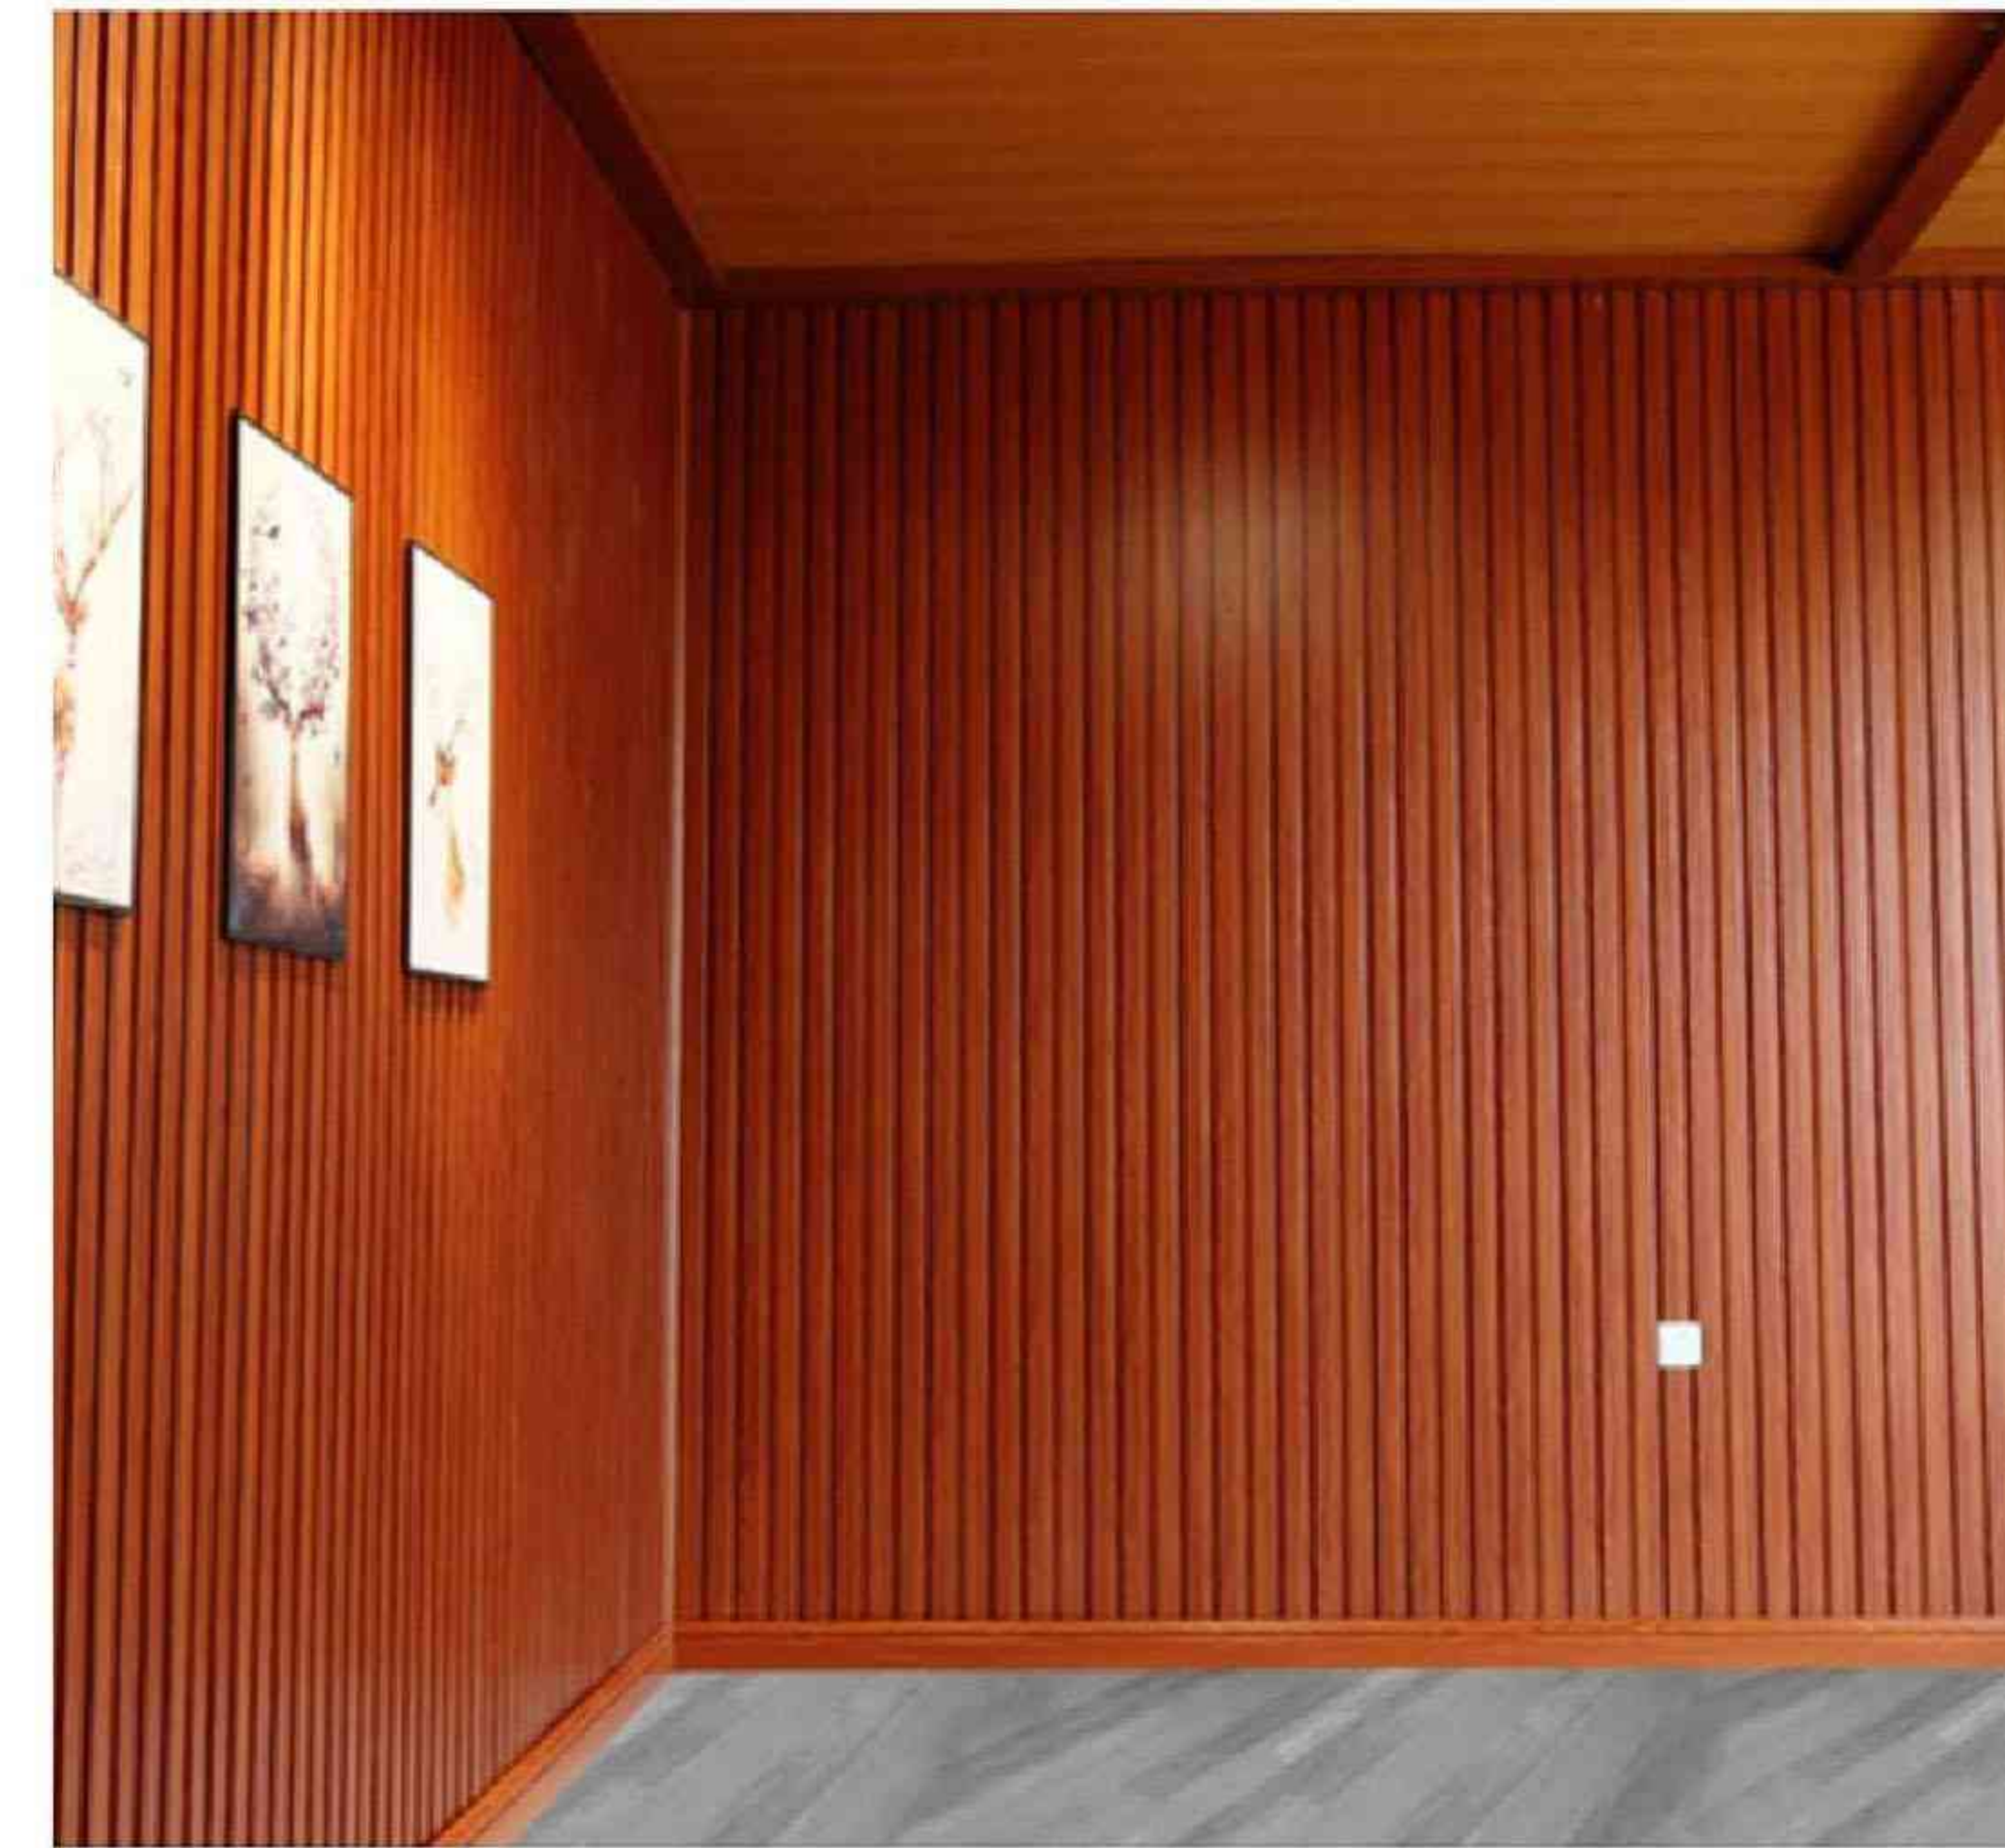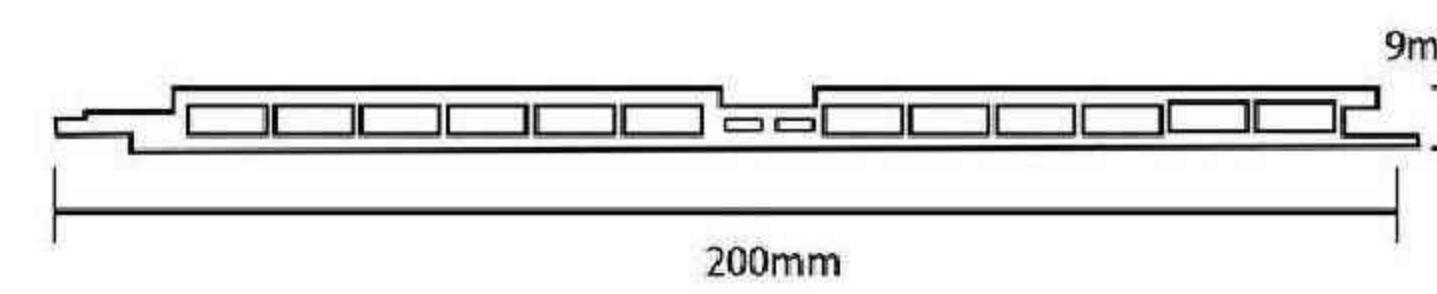

▲ Effect Picture

▼ Finished Design



Orange



Dark gray




Dark brown



Black




Specification

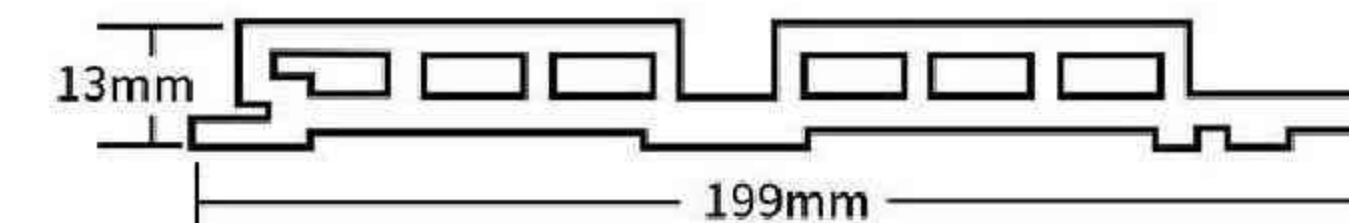




Specification

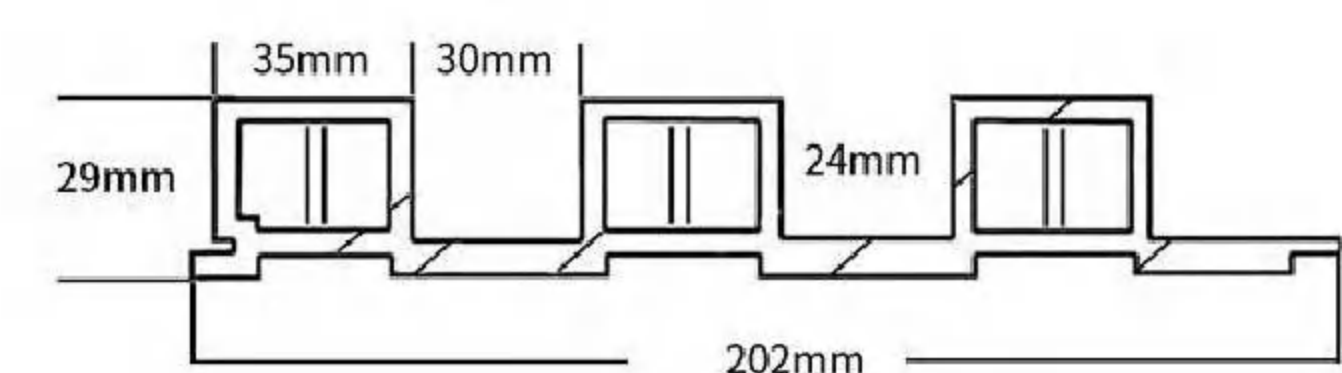


▲ Effect Picture

▼ Finished Design

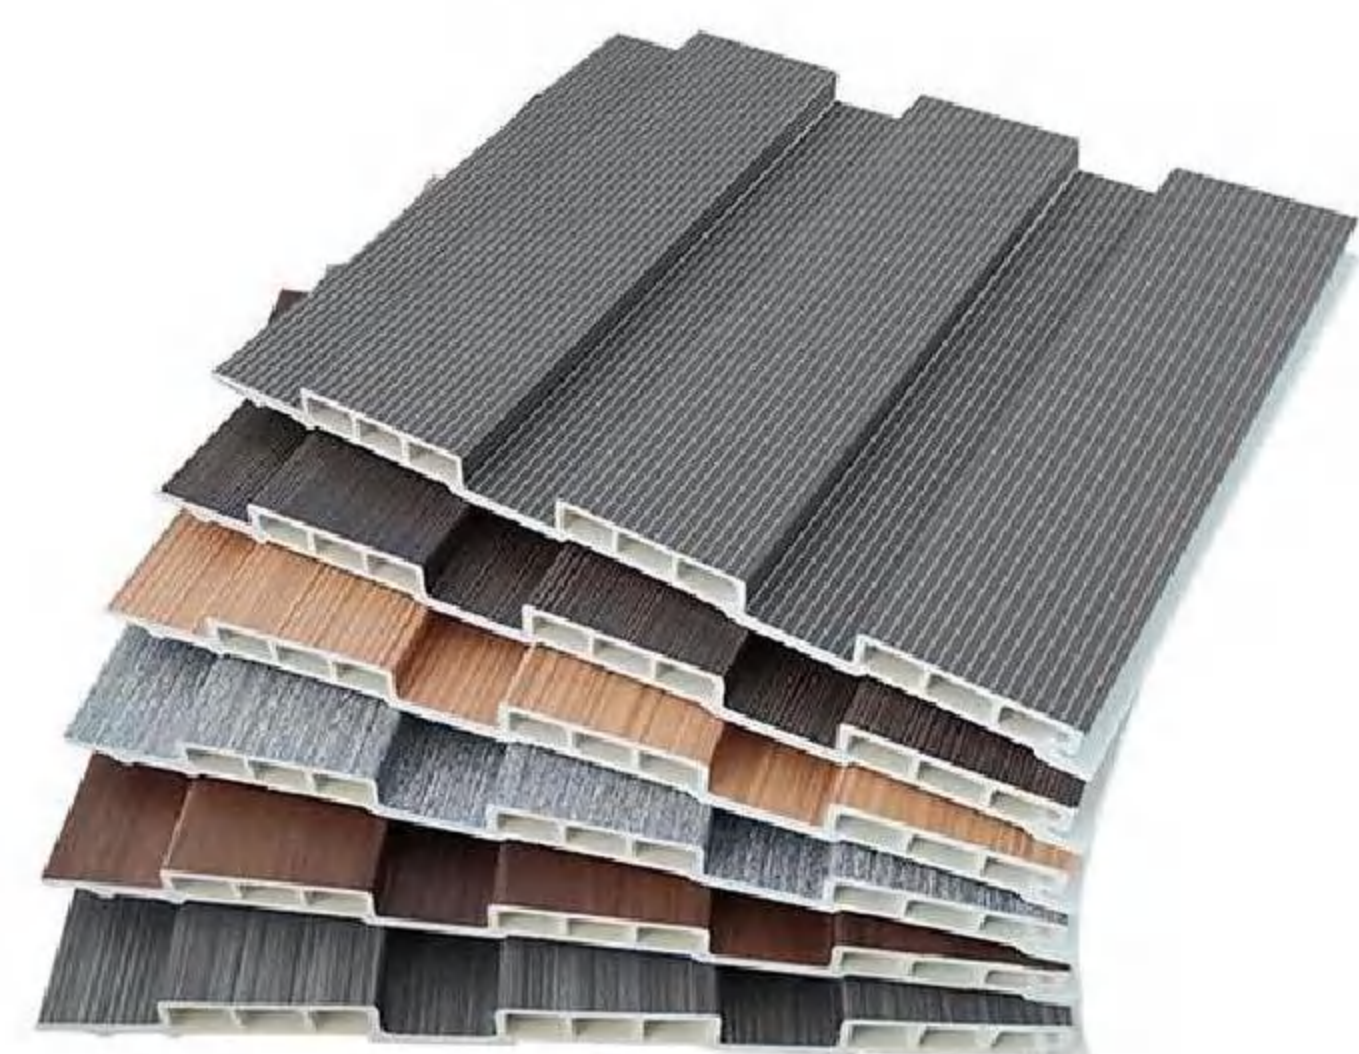


Specification

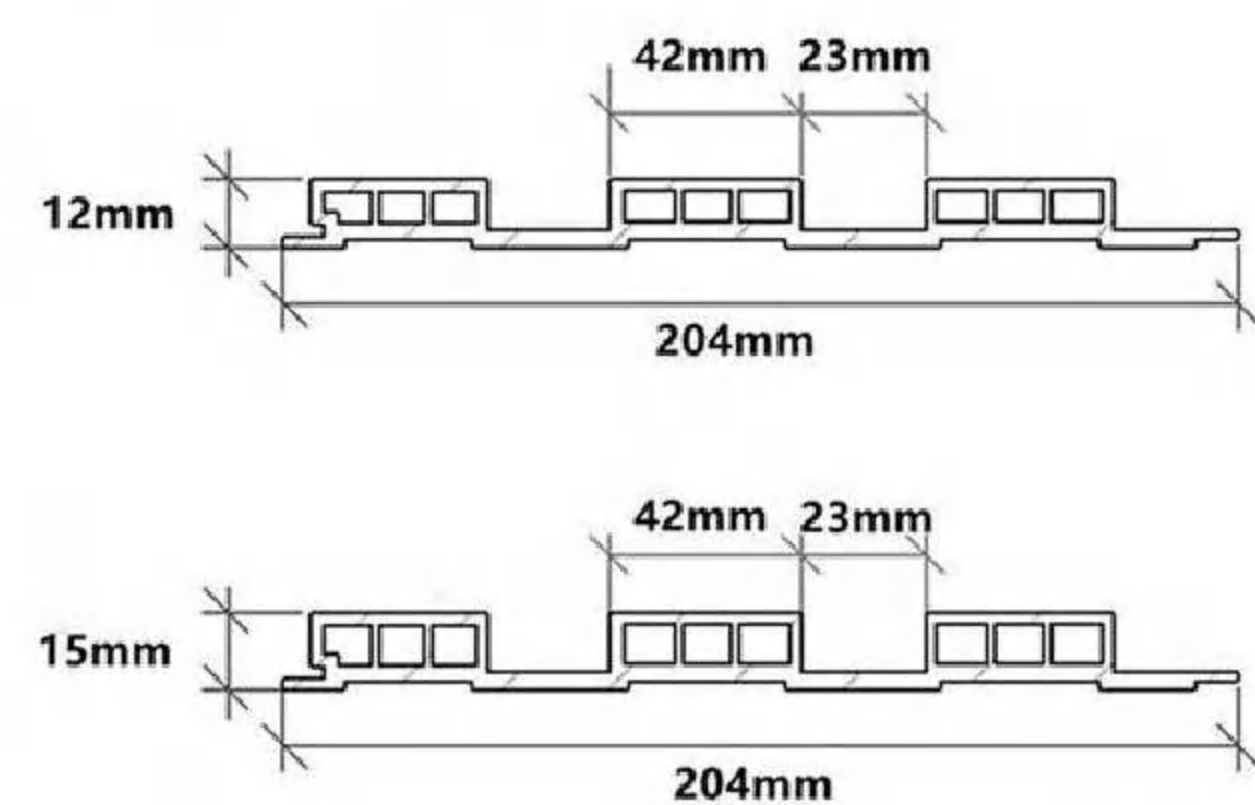

Natural Tech. Wood



Golden Teak

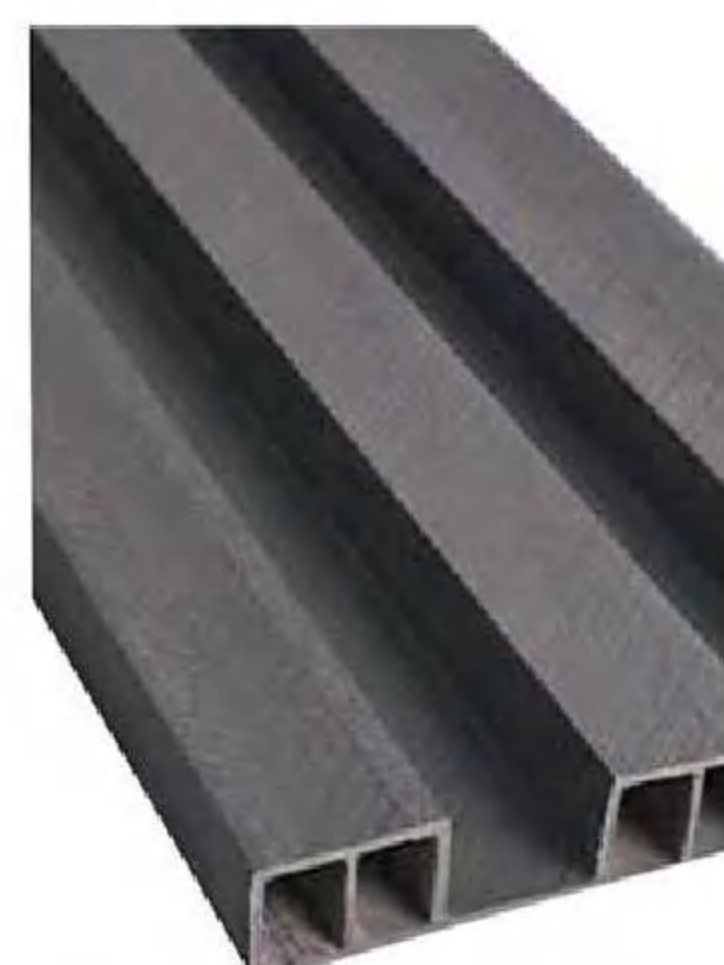


Dark Gray Fishbone



White Real Wood



Specification

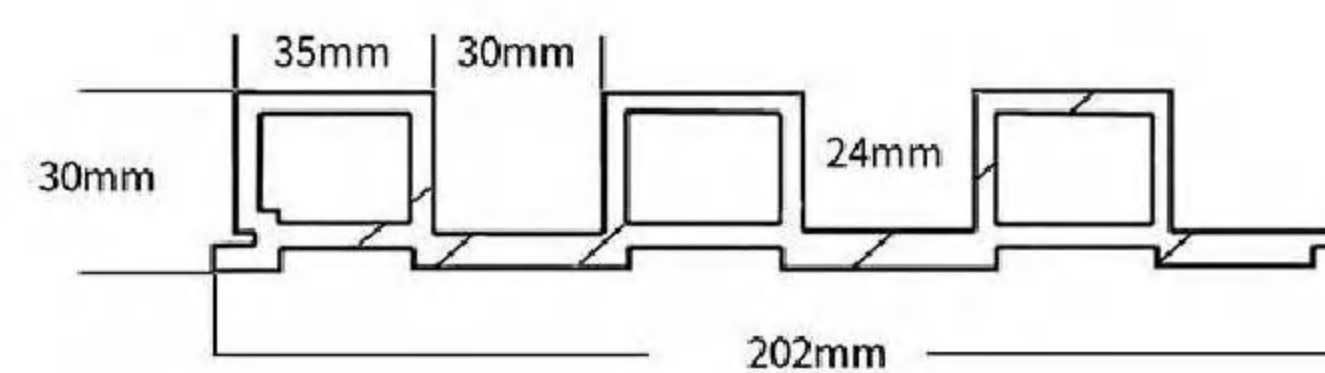

▲ Effect Picture

▼ Finished Design



Light Gray Oak



Nanmu




Brown Tech. Wood




Beige Maple




Specification

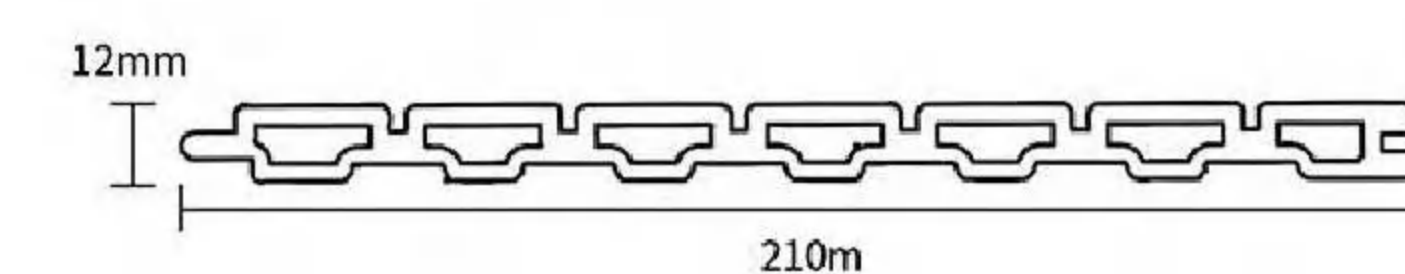

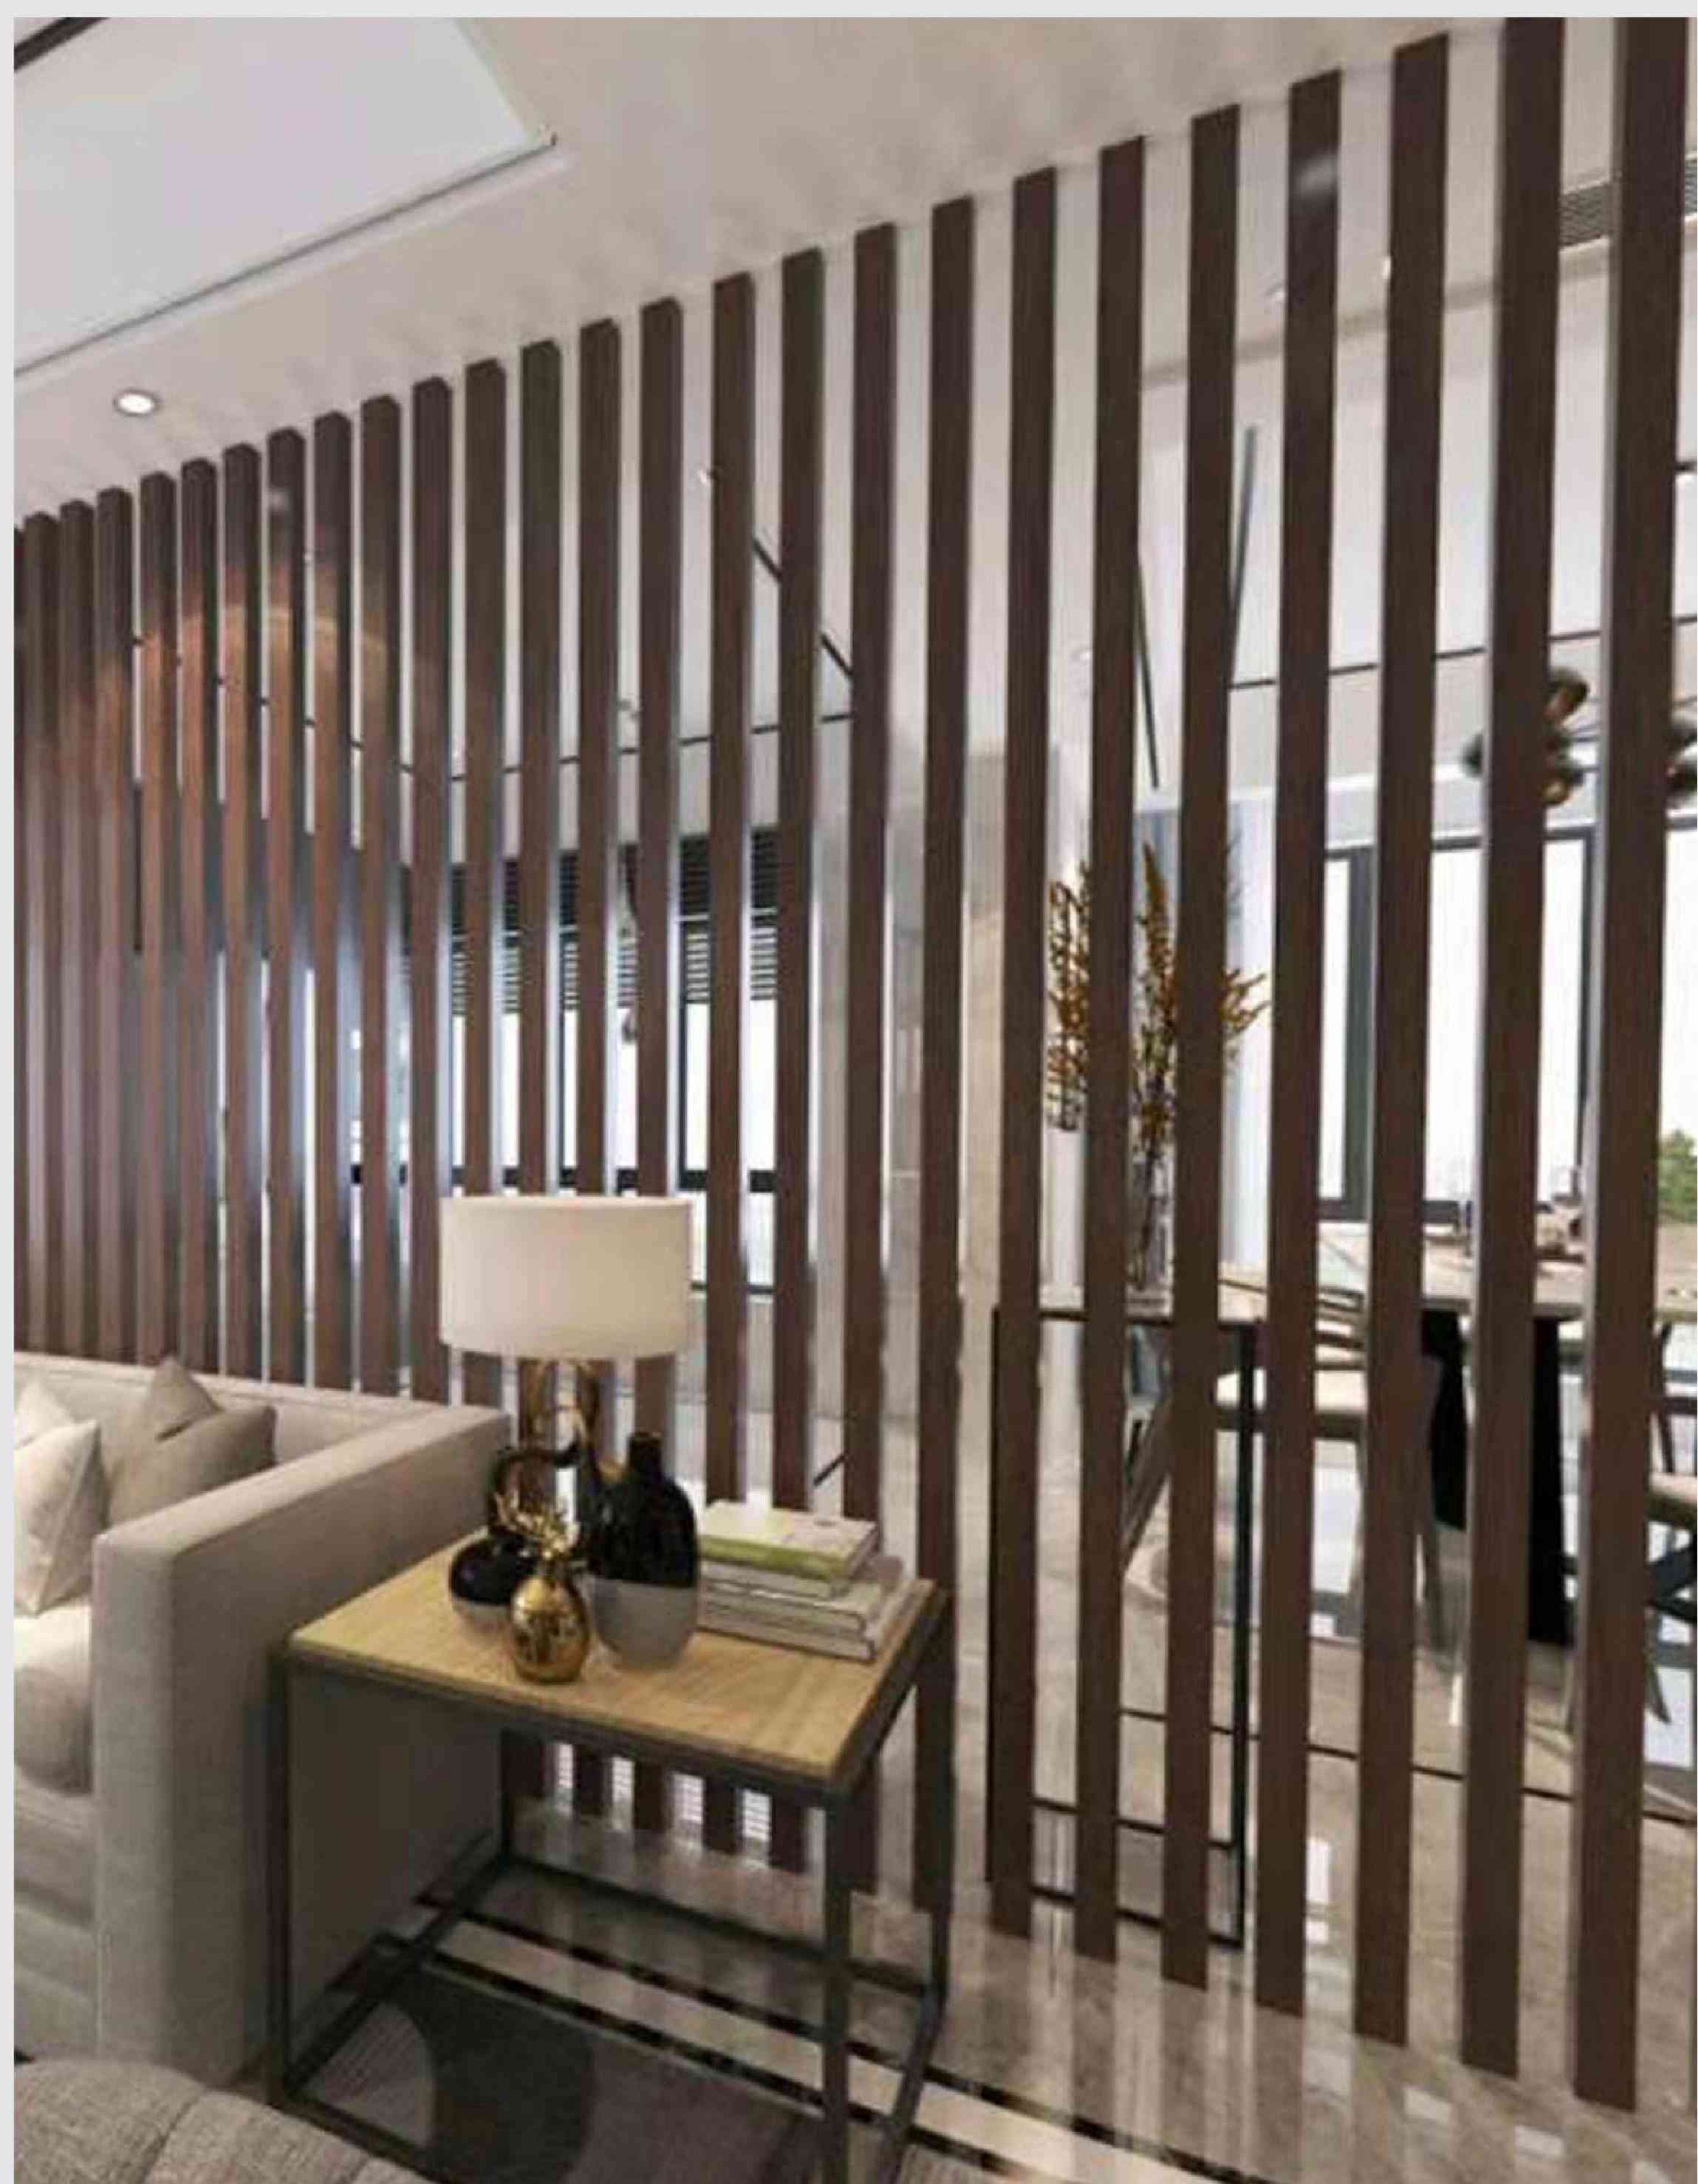

▼ Effect Picture

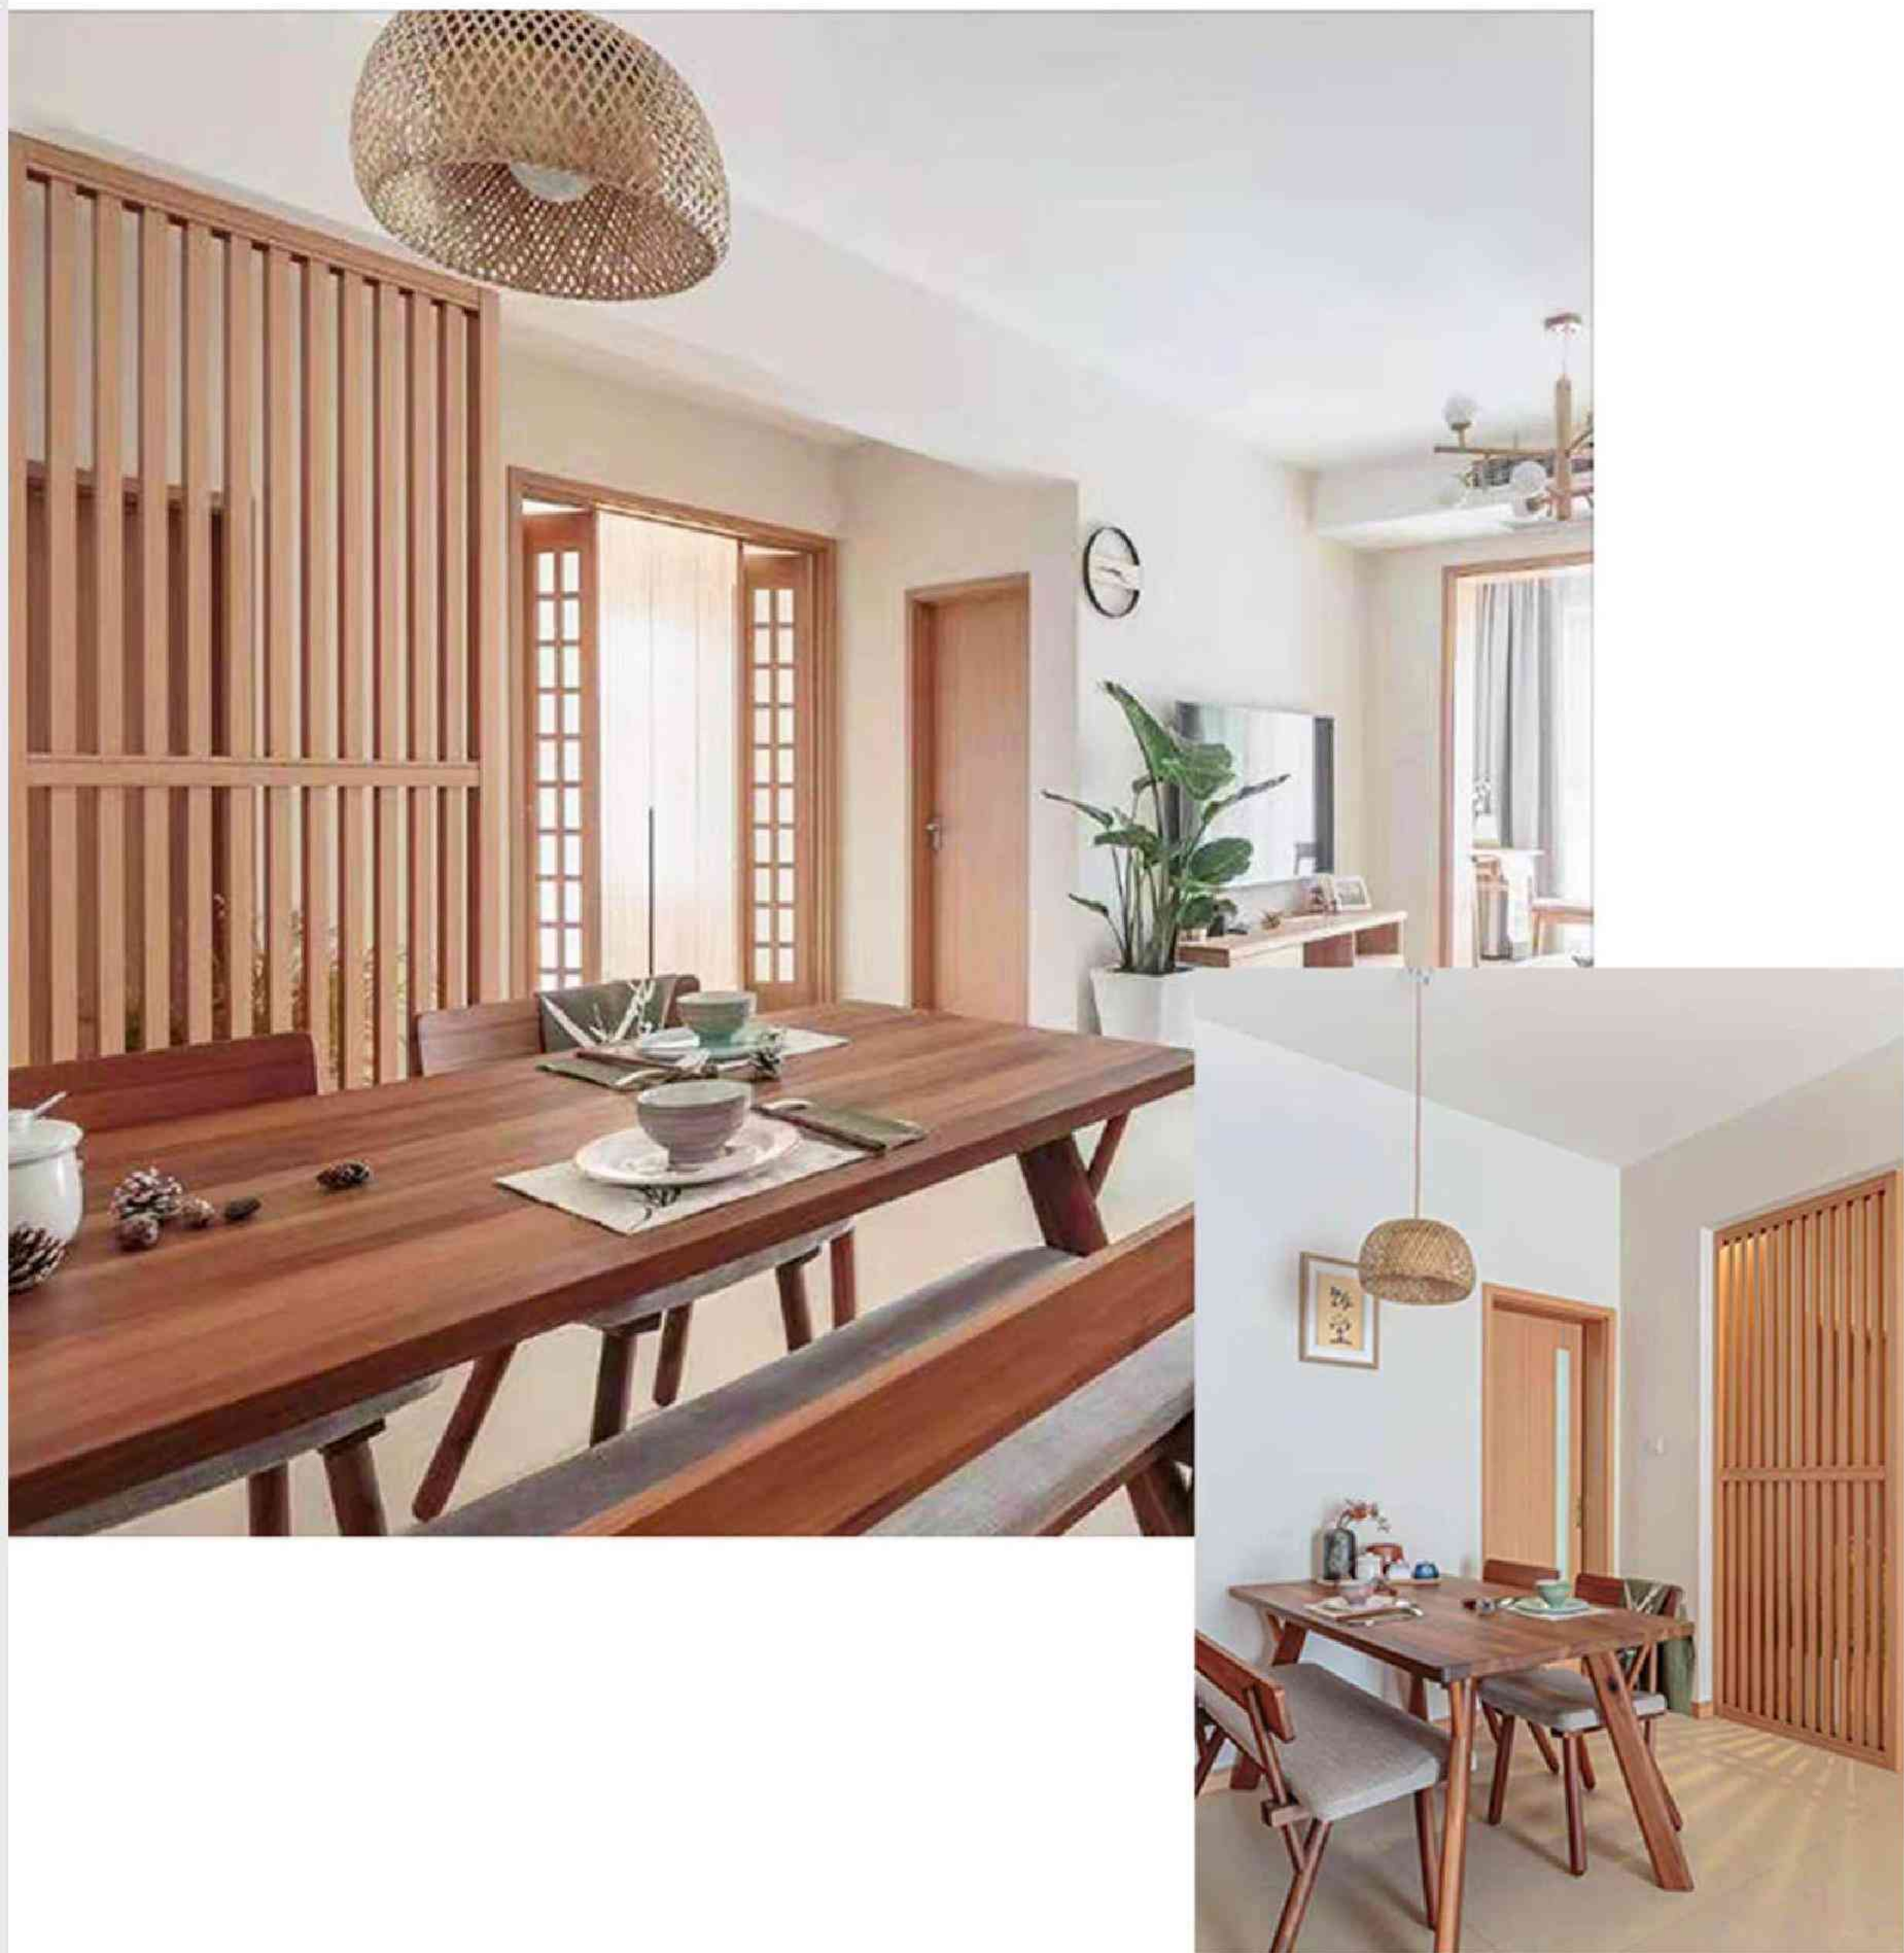

▼ Specification



▼ Color Card




▼ Finished Design



▼ Effect Picture



▼ Specification

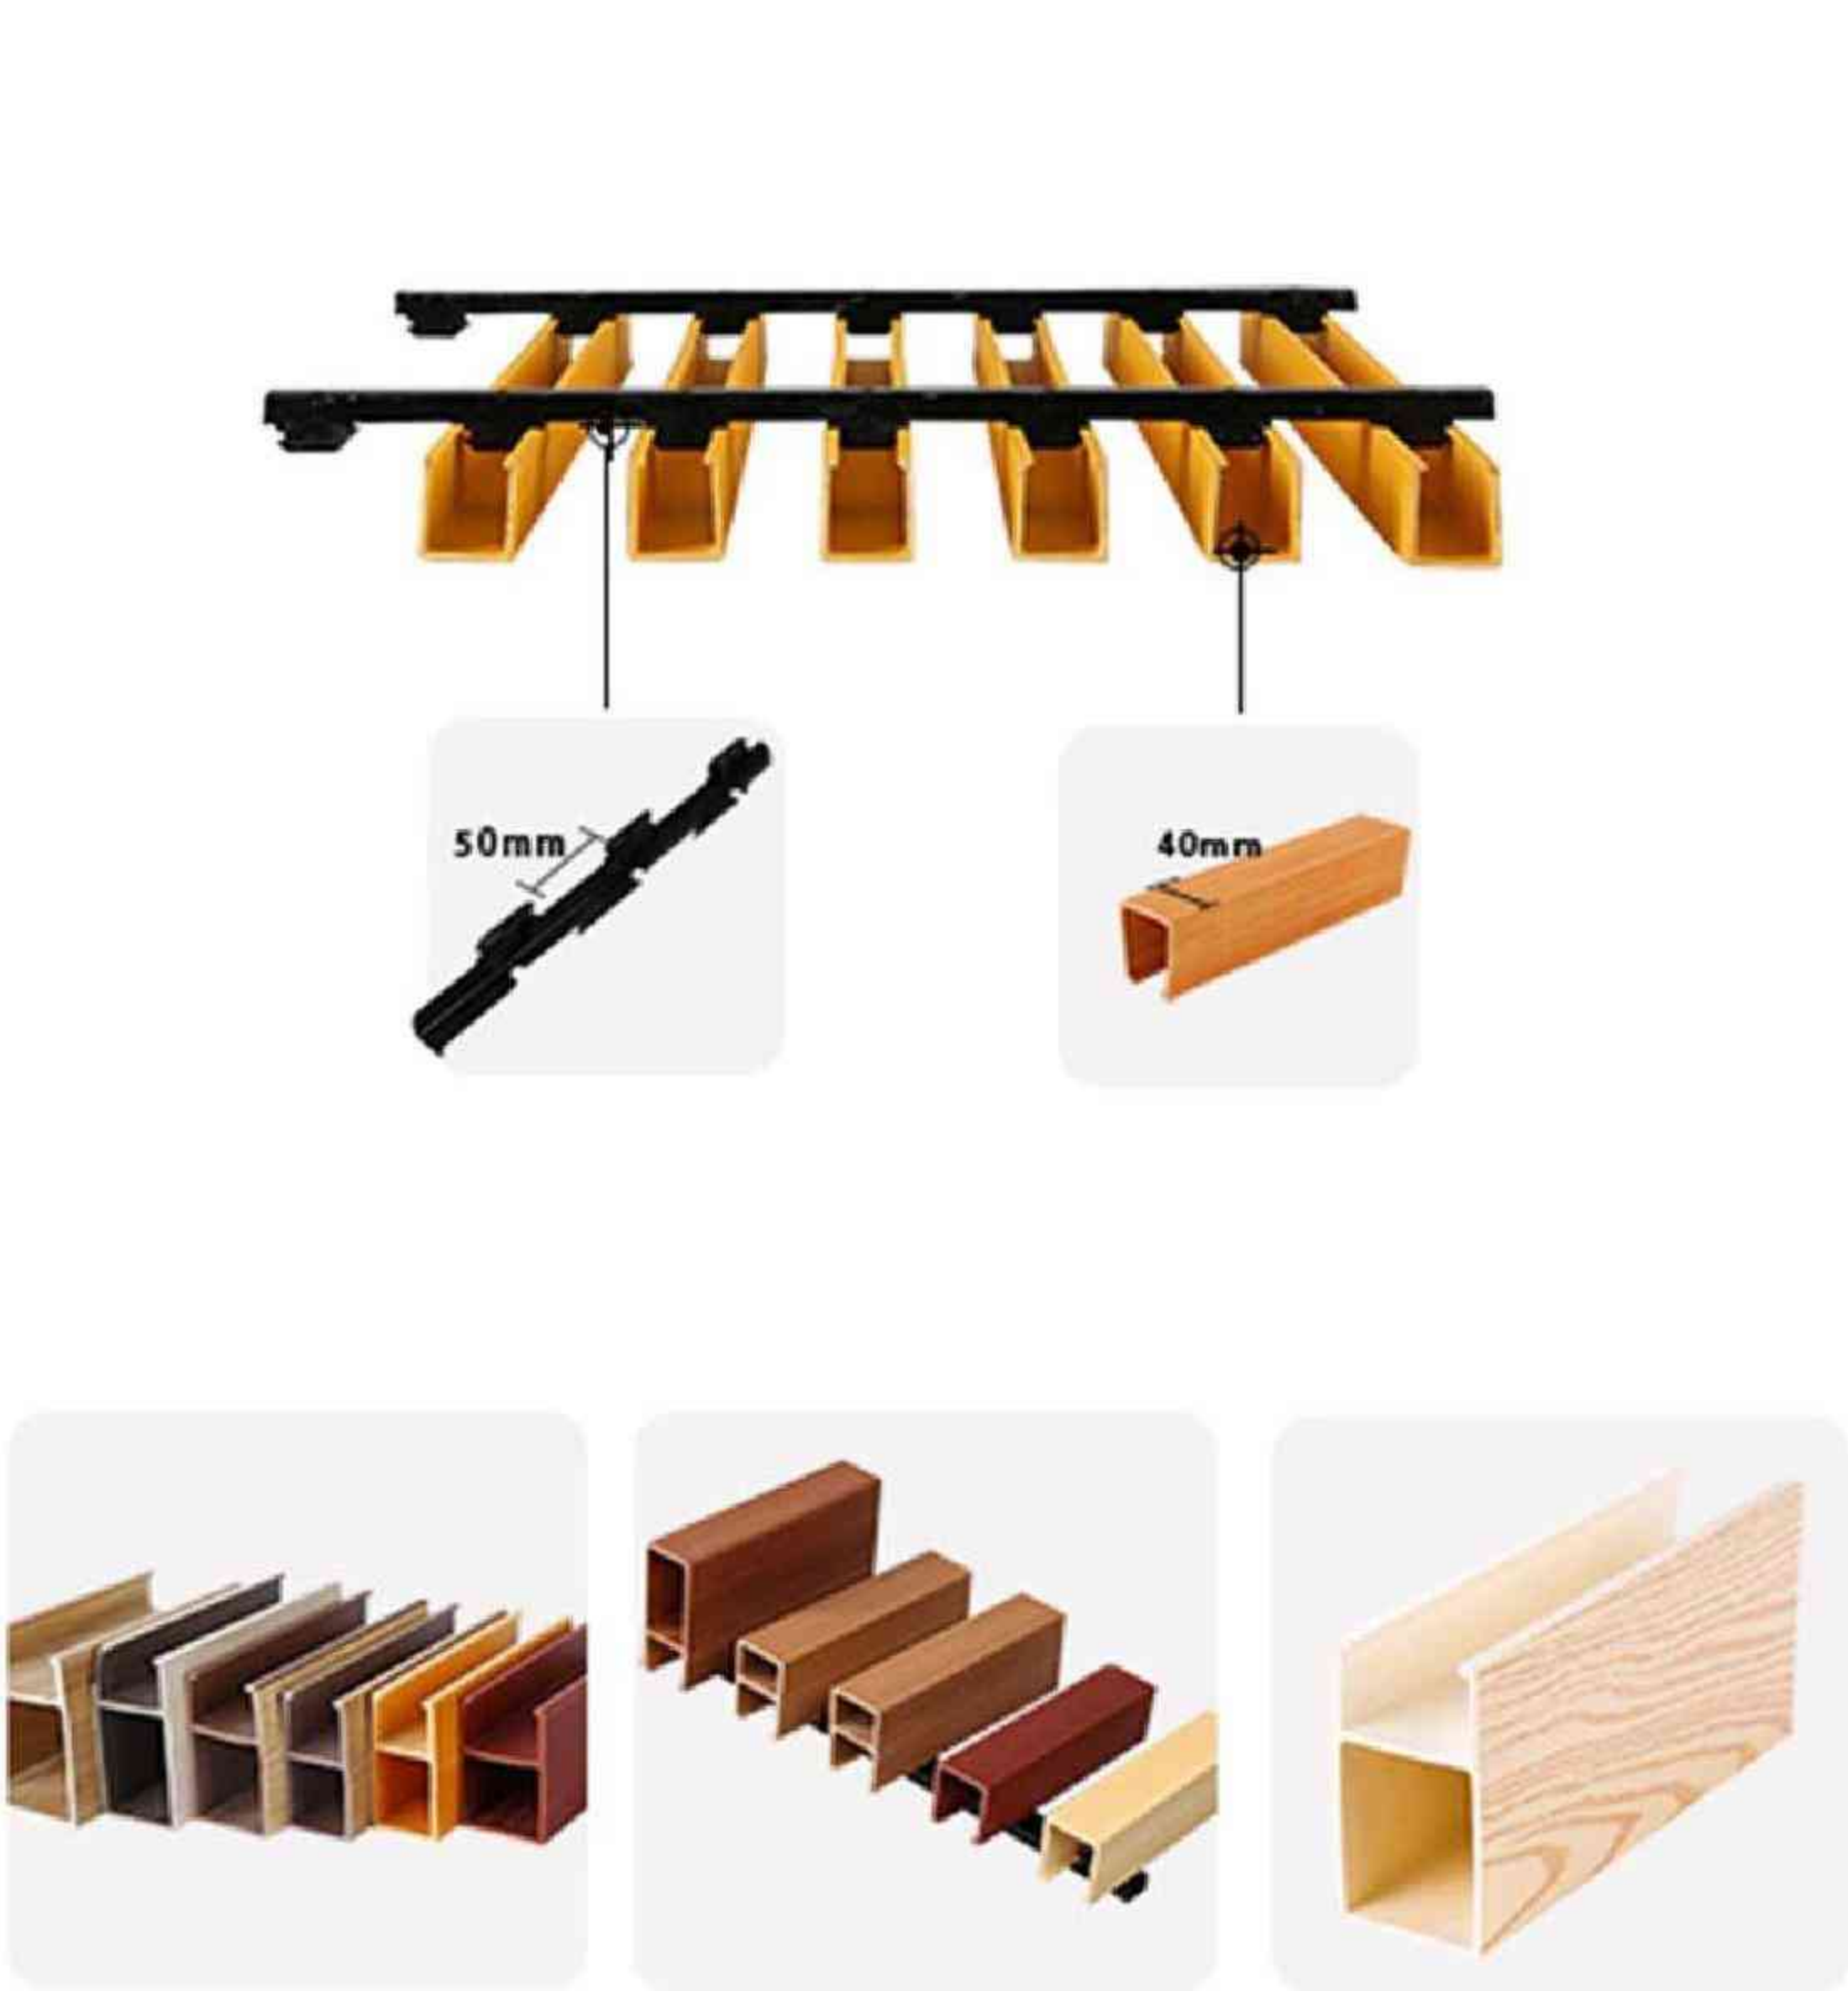


▼ Color Card



▼ Finished Design





Application and Project

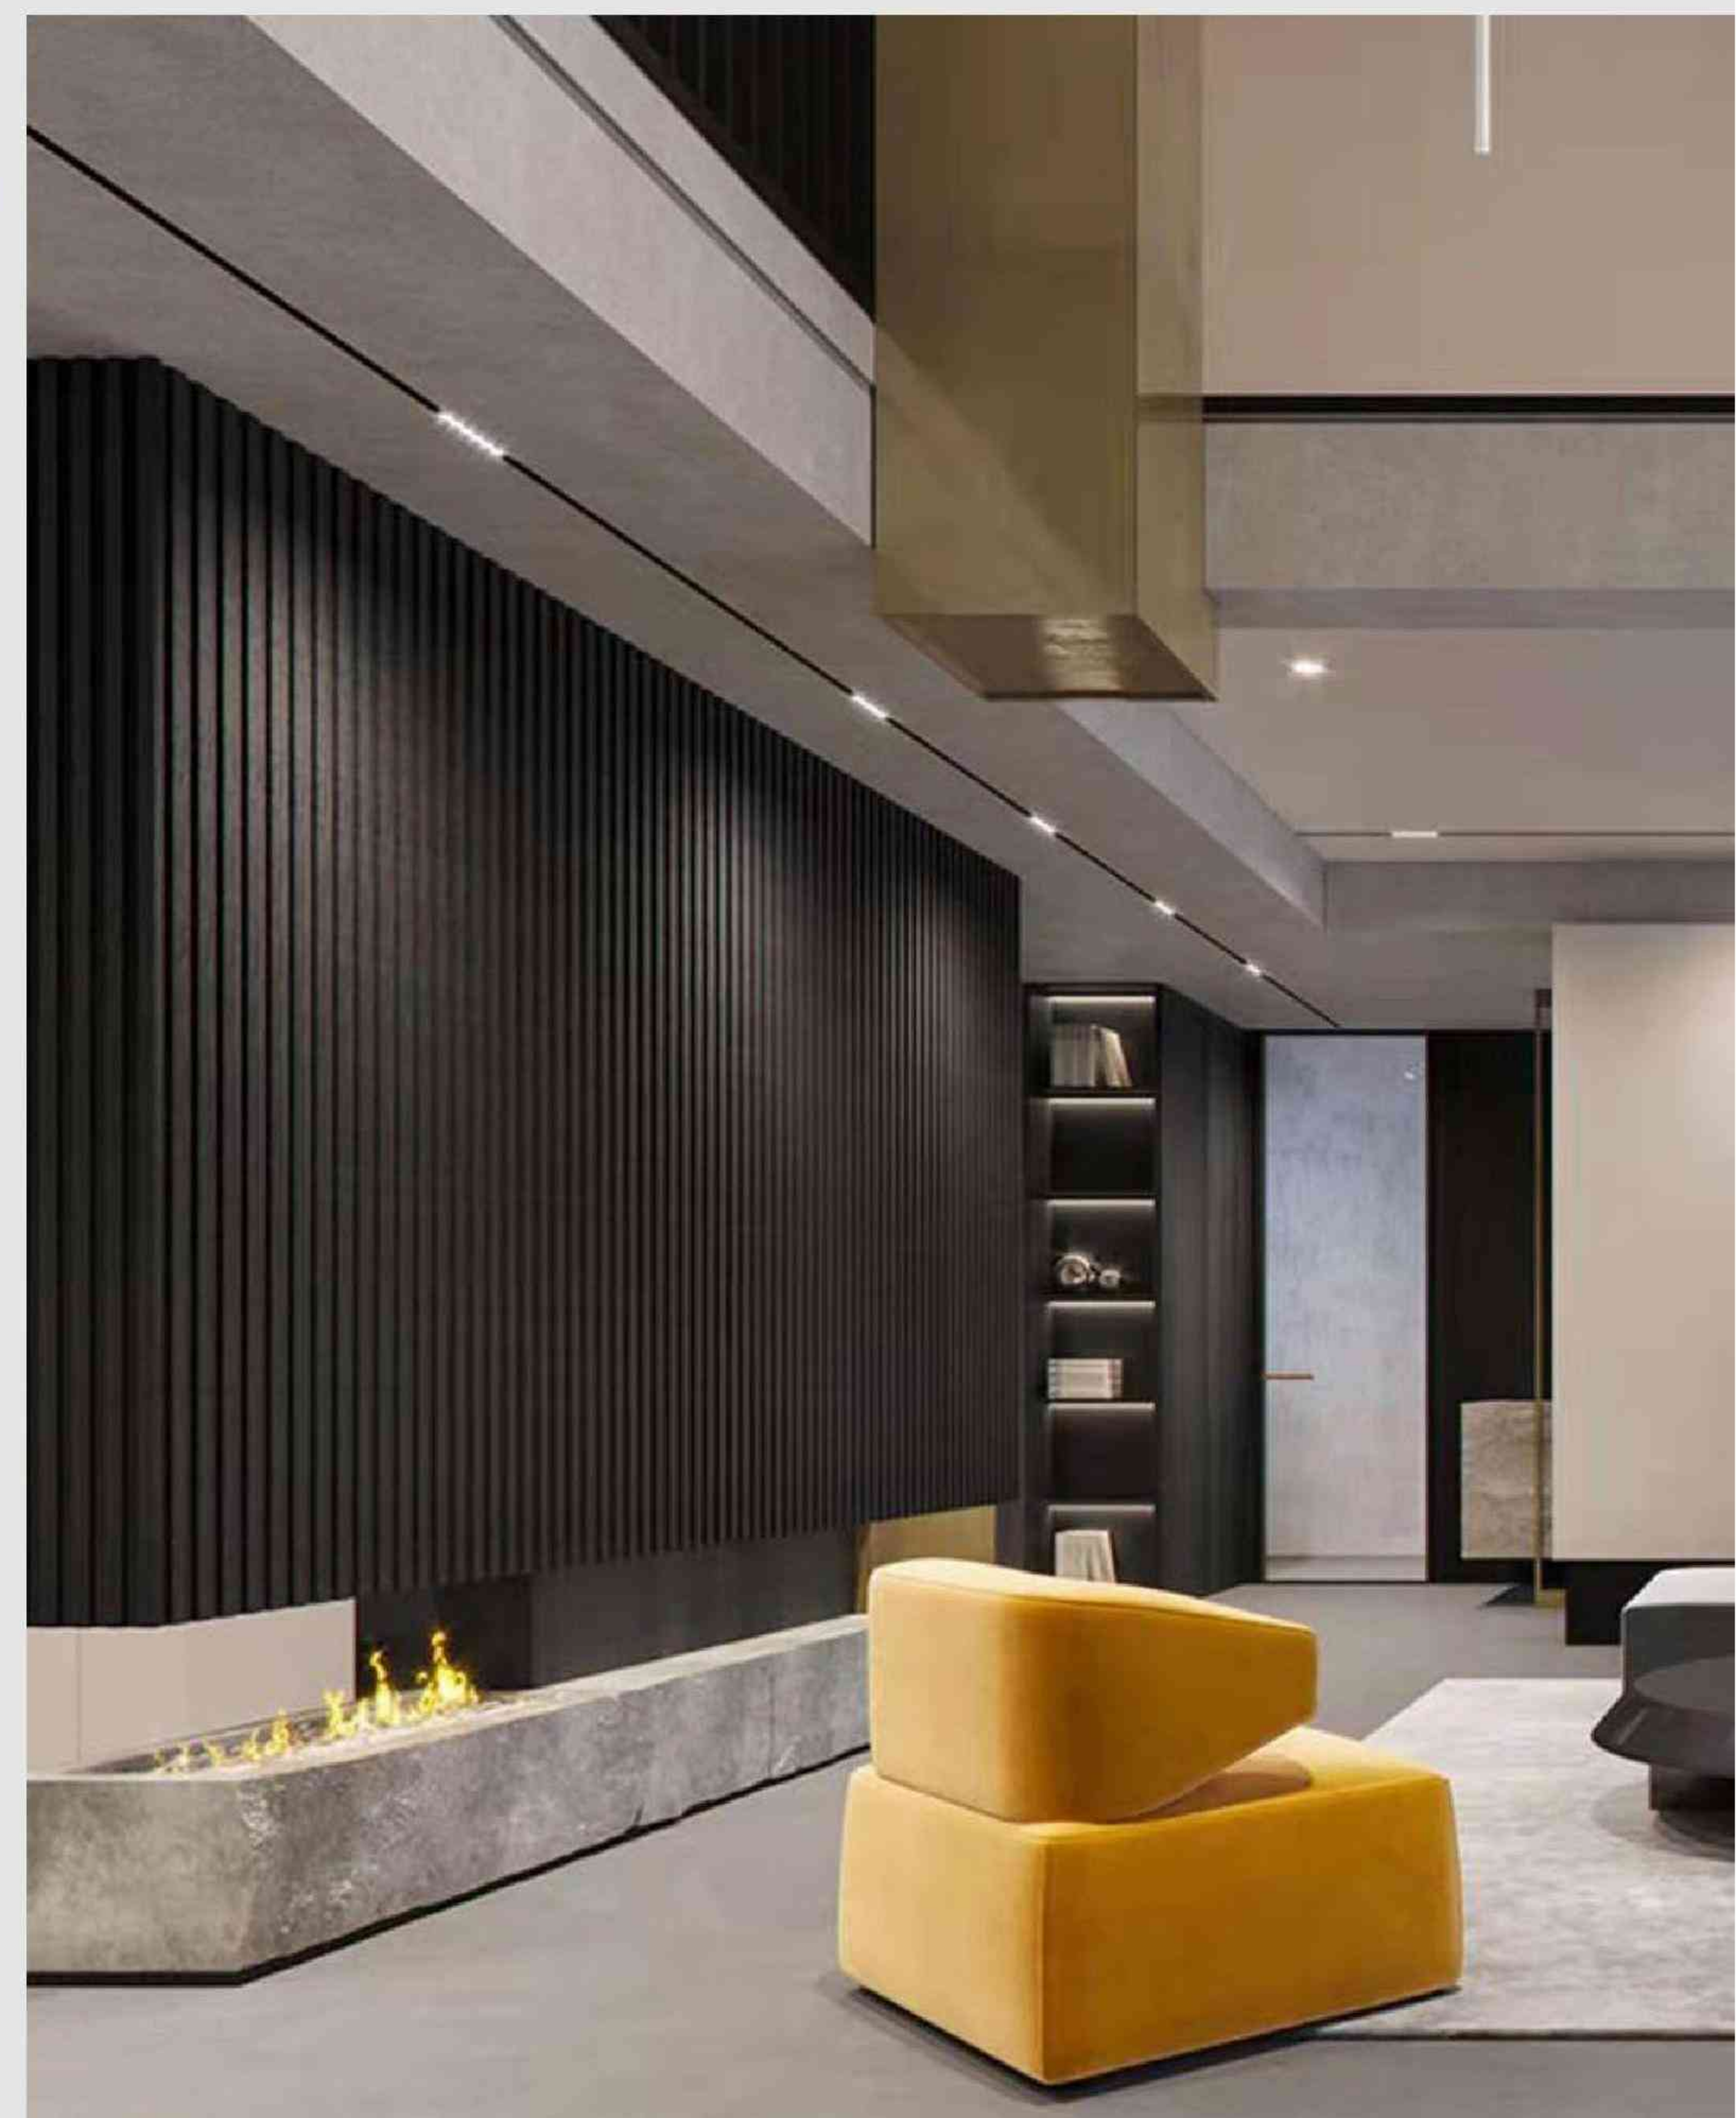


Installation Process

1. First Installation Method: Using Joist

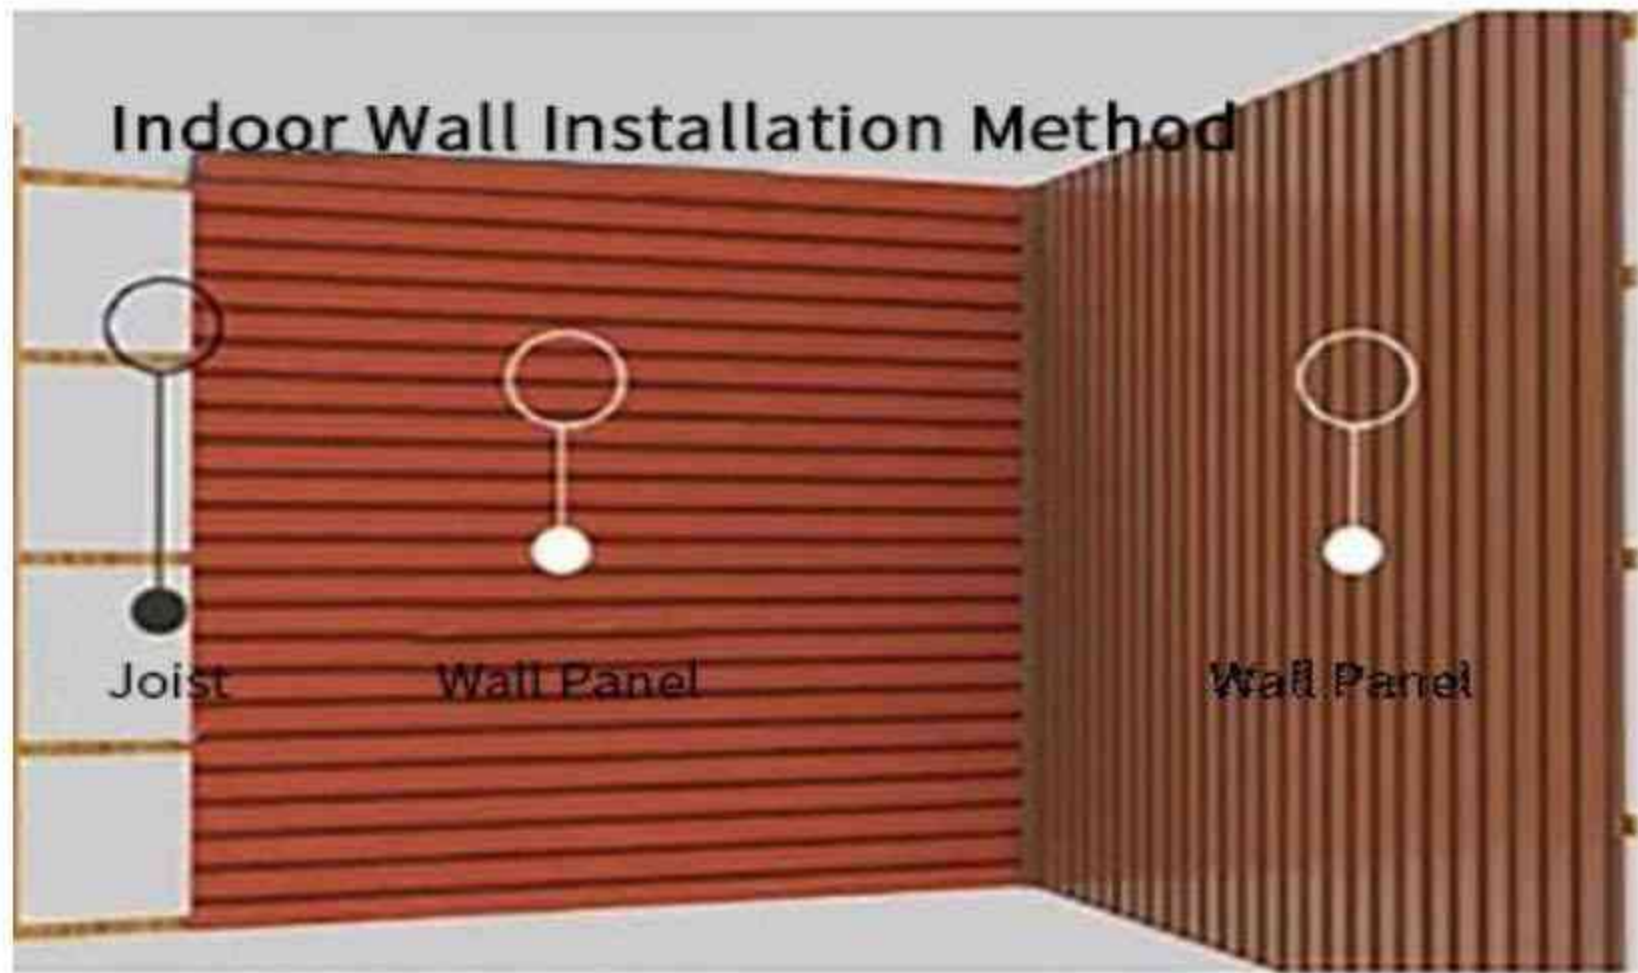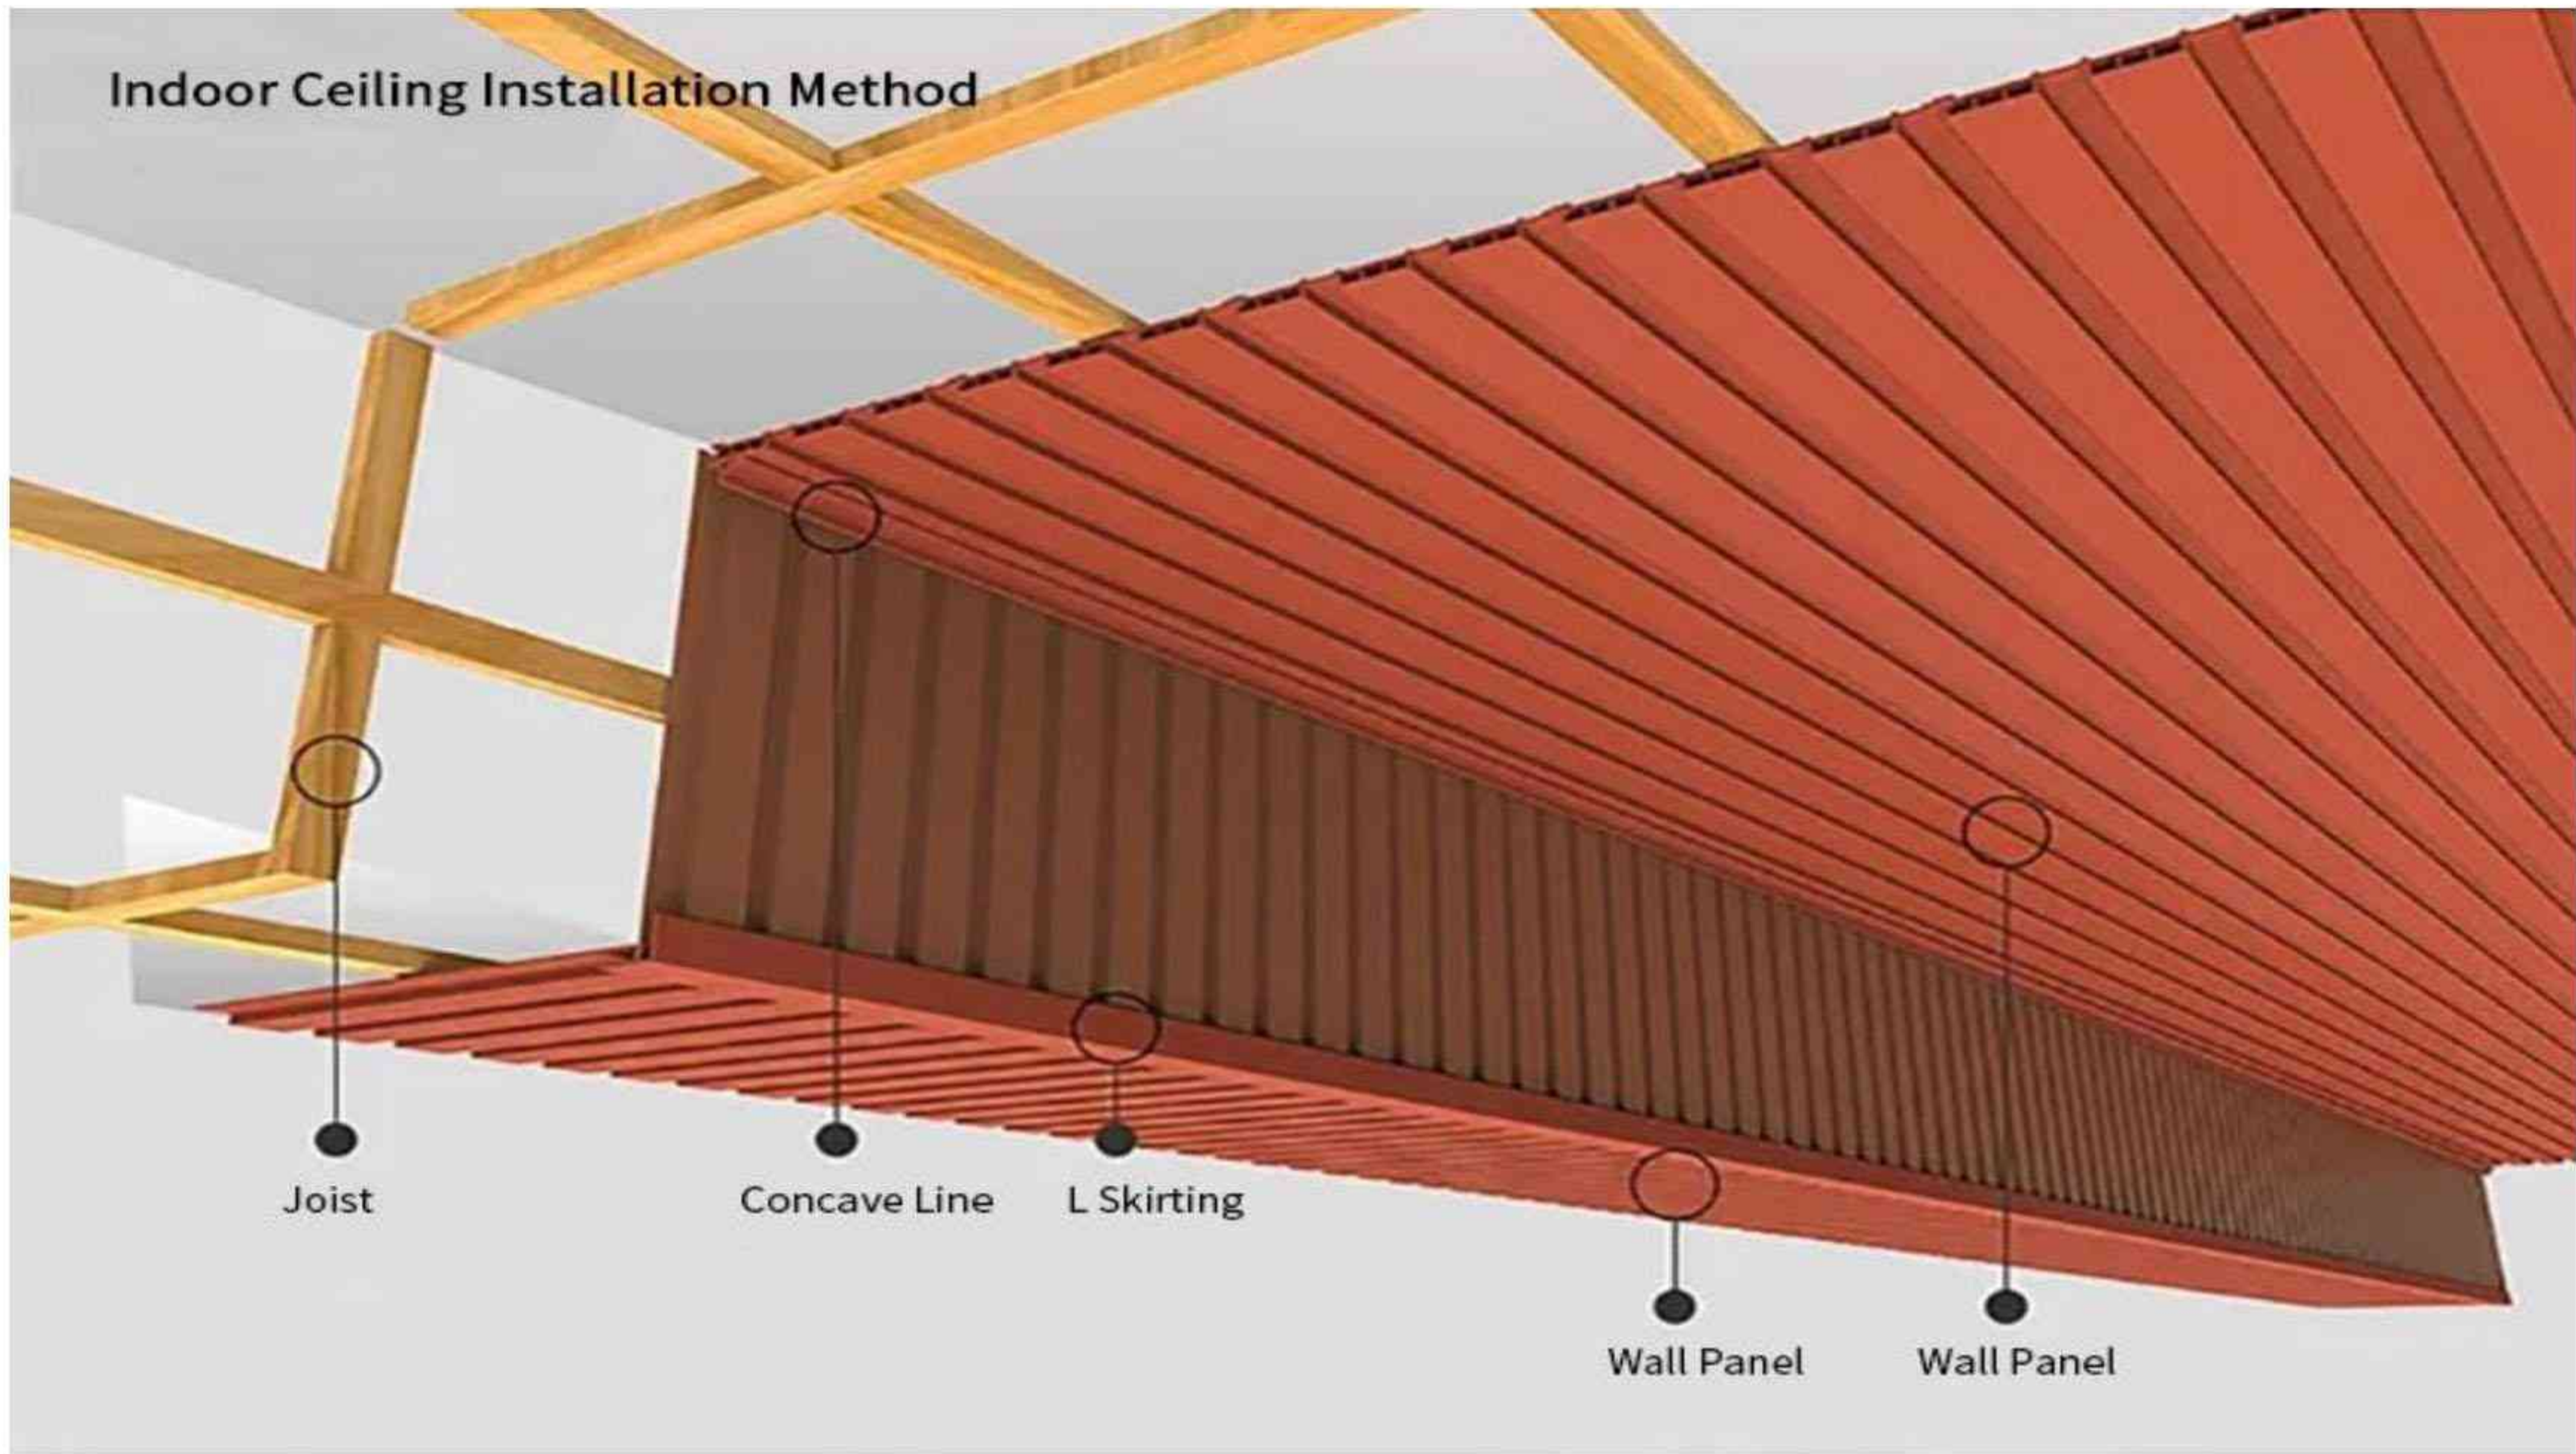

- 1.Install the joist**
Install the joists on the walls and make sure the distance between joist is within 30-40cm and all joists are on the same level.
- 2.Install Panels Vertically and Horizontally**
Install the panels on the joists in turn.

3.Fix Panels with Screws
Please fix the screws with air gun in the places shown in pictures.

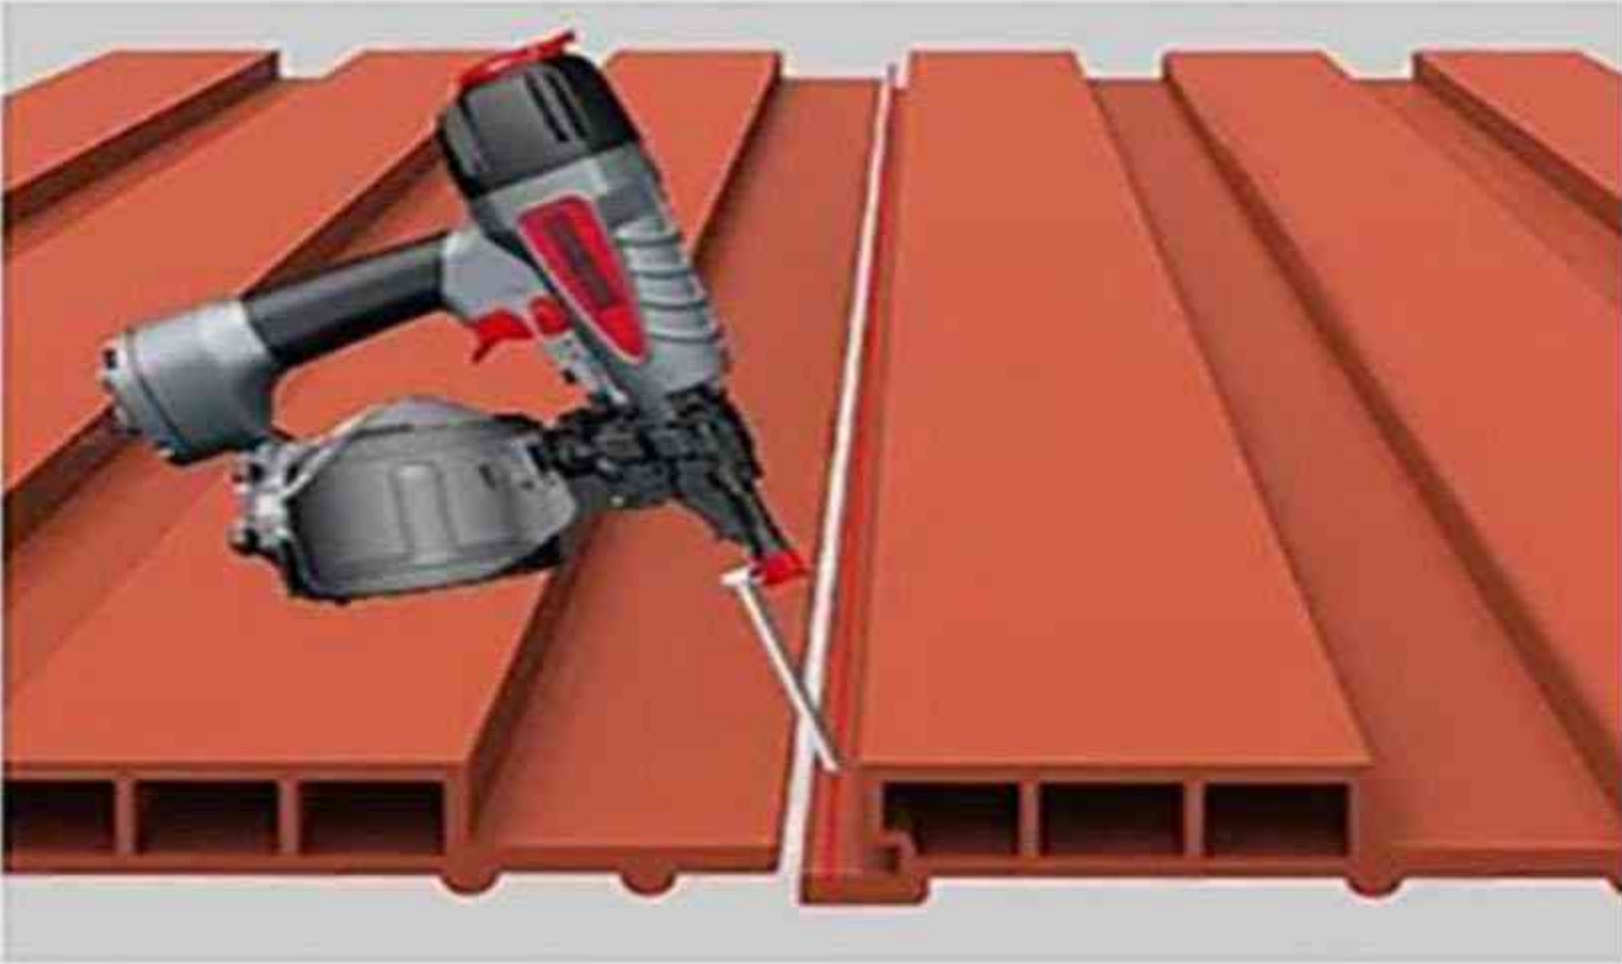

2.Second Installation Method : Using Clips

Accessories & Tools



Screws



Clips



Glues

Installation Process

- 1.WPC wall panels are installed with clips when the wall is flat.
- 2.2pcs of clips are needed for 1 meter of wall panels.
- 3.Glues can be made on the back of the panels to make the panels more stable.
- 4.Any of nail-free glue, glass glue and structural adhesives is ok.

