









# BAK *Golf Cart*

**Your Best Electric Golf Cart Manufacturer in China.**

Comprehensive customization services from design to performance. Best built hunting, off-road, utility, ranch, land management, and club golf carts. **OEM & ODM available.**

## FEATURES:

-  Integrated Electric **Golf Cart & Lithium Battery** Manufacturer
-  BAK Self-Developed Golf Cart Battery Pack: **5-year** warranty for battery packs
-  Reliable safety features like headlights, tail lights, brake lights, turn signals, and a horn
-  **Apple CarPlay** and **Android Auto support** (comes along with LCD touch screen)
-  **Global Service** Centers for Worry-Free After-Sales Support
-  Comprehensive Customization Services from Design to Performance



## K-C Series



K-C2



K-C2+2



K-C4



K-C4+2

<b>DIMENSIONS</b>				
Overall Length	96.85	117.13	125.79	146.06
Overall Width	52.76			
Overall Height	75.2	76.77		
Wheel Base	65.35		95.12	
Front Wheel Track	36.61			
Rear Wheel Track	40.55			
Ground Clearance	3.94			
<b>POWER</b>				
Battery Type	lithium iron phosphate battery			
Battery Capacity	48V100Ah	48V150Ah		48V200Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah			
Charger	Wide voltage platform 110V/220V universal			
DC-DC	300W			
Motor Type	AC motor			
Motor Power	KDS 5kW			
<b>PERFORMANCE</b>				
Seating Capacity	2	4	4	6
Overall Quality(with battery)	≤1146.4(lb)	≤1278.68(lb)	≤1278.68(lb)	≤1477.1(lb)
Maximum speed(MPH)	20			
Climbing Gradient	30% unloaded; 25% fully loaded			
range (18.64mi/h on flat roads)	50-60	60-70		65-75
Minimum turning radius (Foot)	10.33			
Braking distance (Foot)	<11.48			
<b>SUMP</b>				
Front Suspension	Double swing arm independent front suspension			
Rear Suspension	Trailing arm non-independent suspension			
Rear Axle Ratio	12.3: 1			
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking			
Steering System	Bidirectional rack and pinion steering system			
Tire Type	All Terrain Tire			
Tire Size	10-inch			
Wheel Material	Aluminum alloy			
Frame	High-strength sheet metal trapezoidal frame;			
<b>BODY</b>				
Body & Finish	Front cover, seat bucket, body, rear end injection moulded one-piece body covering parts			
Available Body Colors	Metallic paint (colors can be ordered)			
Available Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown			



## K-H Series



K-H2



K-H2+2



K-H4



K-H4+2



K-H6



K-H6+2

### DIMENSIONS

Overall Length	96.85	117.13	125.79	146.06	154.72	175
Overall Width	52.76					
Overall Height	79.92	81.5			80.12	
Wheel Base	66.14		95.91		125.98	
Front Wheel Track	39.96					
Rear Wheel Track	42.32					
Ground Clearance	6.69				3.94	

### POWER

Battery Type	lithium iron phosphate battery					
Battery Capacity	48V100Ah	48V150Ah		48V200Ah		
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah					
Charger	Wide voltage platform 110V/220V universal					
DC-DC	300W					
Motor Type	AC motor					
Motor Power	KDS 5kW					

### PERFORMANCE

Seating Capacity	2	4	4	6	6	8
Overall Quality(with battery)	≤1146.4(lb)	≤1278.68(lb)	≤1278.68(lb)	≤1477.1(lb)	≤1410.96(lb)	≤1543.24(lb)
Maximum speed(MPH)	25				20	
Climbing Gradient	30% unloaded; 25% fully loaded				30% unloaded; 20% fully loaded	
range (18.64mi/h on flat roads)	40-55	50-65	50-65	55-70	55-70	45-60
Minimum turning radius (Foot)	10.5		15.75		19.03	
Braking distance (Foot)	<16.4		<19.69		<22.97	

### SUMP

Front Suspension	Double swing arm independent front suspension					
Rear Suspension	Trailing arm non-independent suspension					
Rear Axle Ratio	14.2:1					
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking					
Steering System	Bidirectional rack and pinion steering system					
Tire Type	All Terrain Tire					
Tire Size	12-inch					
Wheel Material	Aluminum alloy					
Frame	High-strength sheet metal trapezoidal frame;					

### BODY

Body & Finish	Front cover, seat bucket, body, rear end injection moulded one-piece body covering parts					
Available Body Colors	Metallic paint (colors can be ordered)					
Available Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown					



## G-C Series



G-C2



G-C2+2



G-C4



G-C4+2

<b>DIMENSIONS</b>				
Overall Length	96.85	117.13	125.79	146.06
Overall Width	52.76			
Overall Height	75.2	76.77		
Wheel Base	65.35		95.12	
Front Wheel Track	36.61			
Rear Wheel Track	40.55			
Ground Clearance	3.94			
<b>POWER</b>				
Battery Type	lithium iron phosphate battery			
Battery Capacity	48V100Ah	48V150Ah		48V200Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah			
Charger	Wide voltage platform 110V/220V universal			
DC-DC	300W			
Motor Type	AC motor			
Motor Power	KDS 5kW			
<b>PERFORMANCE</b>				
Seating Capacity	2	4	4	6
Overall Quality(with battery)	≤1146.4(lb)	≤1278.68(lb)	≤1278.68(lb)	≤1477.1(lb)
Maximum speed(MPH)	20			
Climbing Gradient	30% unloaded; 25% fully loaded			
range (18.64mi/h on flat roads)	50-60	60-70		65-75
Minimum turning radius (Foot)	10.33			
Braking distance (Foot)	<11.48			
<b>SUMP</b>				
Front Suspension	Double swing arm independent front suspension			
Rear Suspension	Trailing arm non-independent suspension			
Rear Axle Ratio	12.3: 1			
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking			
Steering System	Bidirectional rack and pinion steering system			
Tire Type	All Terrain Tire			
Tire Size	10-inch			
Wheel Material	Aluminum alloy			
Frame	High-strength sheet metal trapezoidal frame;			
<b>BODY</b>				
Body & Finish	Front cover, seat bucket, body, rear end injection moulded one-piece body covering parts			
Available Body Colors	Metallic paint (colors can be ordered)			
Available Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown			



# G-H Series



G-H2



G-H2+2



G-H4



G-H4+2



G-H6



G-H6+2

## DIMENSIONS

Overall Length	96.85	117.13	125.79	146.06	154.72	175
Overall Width	52.76					
Overall Height	79.92	81.5			80.12	
Wheel Base	66.14		95.91		125.98	
Front Wheel Track	39.96					
Rear Wheel Track	42.32					
Ground Clearance	6.69				3.94	

## POWER

Battery Type	lithium iron phosphate battery					
Battery Capacity	48V100Ah	48V150Ah		48V200Ah		
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah					
Charger	Wide voltage platform 110V/220V universal					
DC-DC	300W					
Motor Type	AC motor					
Motor Power	KDS 5kW					

## PERFORMANCE

Seating Capacity	2	4	4	6	6	8
Overall Quality(with battery)	≤1146.4(lb)	≤1278.68(lb)	≤1278.68(lb)	≤1477.1(lb)	≤1410.96(lb)	≤1543.24(lb)
Maximum speed(MPH)	25				20	
Climbing Gradient	30% unloaded; 25% fully loaded				30% unloaded; 20% fully loaded	
range (18.64mi/h on flat roads)	40-55	50-65	50-65	55-70	55-70	45-60
Minimum turning radius (Foot)	10.5		15.75		19.03	
Braking distance (Foot)	<16.4		<19.69		<22.97	

## SUMP

Front Suspension	Double swing arm independent front suspension					
Rear Suspension	Trailing arm non-independent suspension					
Rear Axle Ratio	14.2:1					
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking					
Steering System	Bidirectional rack and pinion steering system					
Tire Type	All Terrain Tire					
Tire Size	12-inch					
Wheel Material	Aluminum alloy					
Frame	High-strength sheet metal trapezoidal frame;					

## BODY

Body & Finish	Front cover, seat bucket, body, rear end injection moulded one-piece body covering parts					
Available Body Colors	Metallic paint (colors can be ordered)					
Available Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown					



# A Series



A-C2



A-C2+2



A-C4



A-C4+2



A-C6



A-C6+2

## DIMENSIONS

Overall Length	105.35	106.69	123.82	137.6	153.82	168.11
Overall Width	45.51			46.26		
Overall Height	72.17			72.83		
Wheel Base	68.5	65.75		96.06		127.17
Front Wheel Track	34.25			34.84		
Rear Wheel Track	39.37			38.58		
Ground Clearance	5.91			4.72		

## POWER

Battery Type	Maintenance-free deep cycle lead-acid batteries 8V*6pcs 48V					
Charger	48V25A intelligent automatic charger					
DC-DC	48V/12V300W					
Motor Type	AC asynchronous					
Motor Power	5kW					

## PERFORMANCE

Seating Capacity	2	4	4	6	6	8
Overall Quality(with battery)	≤1256.63(lb)	≤1256.63(lb)	≤1322.77(lb)	≤1410.96(lb)	≤1499.14(lb)	≤1565.28(lb)
Maximum speed(MPH)	17.4			25		
Climbing Gradient	25%			30%		
range(MPH)	49.71-62.14	49.71-62.14	43.5-55.92	43.5-55.92	43.5-49.71	43.5-49.71
Minimum turning radius (Foot)	9.84	10.4		13.78		17.39
Braking distance (Foot)	<13.12	<9.51		<11.48		<14.76

## SUMP

Front Suspension	MacPherson independent suspension					
Rear Suspension	Integral arm Coil spring damping	Leaf spring type non-independent suspension				
Rear Axle Ratio	12.3:1					
Brake System	Self-adjusting mechanical brake	Mechanical brake + electromagnetic brake				
Steering System	Bidirectional rack and pinion steering system					
Tire Type	Grass tire					
Tire Size	8-inch					
Wheel Material	Aluminum alloy					
Frame	High-strength steel structural parts, electrophoretic surface treatment process					

## BODY

Body & Finish	ABS with automotive paint	Injection molding plus automotive paint	ABS with automotive paint			
Available Body Colors	Metallic paint (colors can be ordered)					
Available Seat Colors	Standard beige (without headrest)					



## E Series



E-H4

<b>DIMENSIONS</b>	
Overall Length(inch)	117.13
Overall Widthv(inch)	52.76
Overall Height(inch)	81.5
Wheel Base(inch)	66.14
Front Wheel Track(inch)	39.96
Rear Wheel Track(inch)	42.32
Ground Clearance(inch)	6.69
<b>POWER</b>	
Battery Type	iron phosphate battery
Battery Capacity	48V150Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah
Charger	Wide voltage platform 110V/220V universal
DC-DC	300W
Motor Type	AC motor
Motor Power	KDS 5kW
<b>PERFORMANCE</b>	
Seating Capacity	4
Overall Quality(with battery)	≤1278.68(lb)
Maximum speed(MPH)	25
Climbing Gradient	30% unloaded; 25% fully loaded
range (18.64mi/h on flat roads)	50-65
Minimum turning radius (Foot)	10.5
Braking distance (Foot)	<16.4
<b>SUMP</b>	
Front Suspension	Double swing arm independent front suspension
Rear Suspension	Trailing arm non-independent suspension
Rear Axle Ratio	14.2:1
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking
Steering System	Bidirectional rack and pinion steering system
Tire Type	All Terrain Tire
Tire Size	12-inch
Wheel Material	Aluminum alloy
Frame	High-strength sheet metal trapezoidal frame;
<b>BODY</b>	
Body & Finish	Front cover, seat bucket, body,rear end injection moulded one-piece body covering parts
Avaiable Body Colors	Metallic paint (colors can be ordered)
Avaiable Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown



# F Series



F-H2+2

## DIMENSIONS

Overall Length(inch)	117.13
Overall Widthv(inch)	52.76
Overall Height(inch)	81.5
Wheel Base(inch)	66.14
Front Wheel Track(inch)	39.96
Rear Wheel Track(inch)	42.32
Ground Clearance(inch)	6.69

## POWER

Battery Type	iron phosphate battery
Battery Capacity	48V150Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah
Charger	Wide voltage platform 110V/220V universal
DC-DC	300W
Motor Type	AC motor
Motor Power	KDS 5kW

## PERFORMANCE

Seating Capacity	4
Overall Quality(with battery)	≤1278.68(lb)
Maximum speed(MPH)	25
Climbing Gradient	30% unloaded; 25% fully loaded
range (18.64mi/h on flat roads)	50-65
Minimum turning radius (Foot)	10.5
Braking distance (Foot)	<16.4

## SUMP

Front Suspension	Double swing arm independent front suspension
Rear Suspension	Trailing arm non-independent suspension
Rear Axle Ratio	14.2:1
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking
Steering System	Bidirectional rack and pinion steering system
Tire Type	All Terrain Tire
Tire Size	12-inch
Wheel Material	Aluminum alloy
Frame	High-strength sheet metal trapezoidal frame;

## BODY

Body & Finish	Front cover, seat bucket, body, rear end injection moulded one-piece body covering parts
Avaiable Body Colors	Metallic paint (colors can be ordered)
Avaiable Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown





## K1 Series



K1-H2+2

### DIMENSIONS

Overall Length(inch)	117.13
Overall Widthv(inch)	52.76
Overall Height(inch)	81.5
Wheel Base(inch)	66.14
Front Wheel Track(inch)	39.96
Rear Wheel Track(inch)	42.32
Ground Clearance(inch)	6.69

### POWER

Battery Type	lithium iron phosphate battery
Battery Capacity	48V150Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah
Charger	Wide voltage platform 110V/220V universal
DC-DC	300W
Motor Type	AC motor
Motor Power	KDS 5kW

### PERFORMANCE

Seating Capacity	4
Overall Quality(with battery)	≤1278.68(lb)
Maximum speed(MPH)	25
Climbing Gradient	30% unloaded; 25% fully loaded
range (18.64mi/h on flat roads)	50-65
Minimum turning radius (Foot)	10.5
Braking distance (Foot)	<16.4

### SUMP

Front Suspension	Double swing arm independent front suspension
Rear Suspension	Trailing arm non-independent suspension
Rear Axle Ratio	14.2:1
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking
Steering System	Bidirectional rack and pinion steering system
Tire Type	All Terrain Tire
Tire Size	12-inch
Wheel Material	Aluminum alloy
Frame	High-strength sheet metal trapezoidal frame;

### BODY

Body & Finish	Front cover, seat bucket, body,rear end injection moulded one-piece body covering parts
Avaiable Body Colors	Metallic paint (colors can be ordered)
Avaiable Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown



## R Series



R-H2+2

<b>DIMENSIONS</b>	
Overall Length(inch)	117.13
Overall Widthv(inch)	52.76
Overall Height(inch)	81.5
Wheel Base(inch)	66.14
Front Wheel Track(inch)	39.96
Rear Wheel Track(inch)	42.32
Ground Clearance(inch)	6.69
<b>POWER</b>	
Battery Type	lithium iron phosphate battery
Battery Capacity	48V150Ah
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah
Charger	Wide voltage platform 110V/220V universal
DC-DC	300W
Motor Type	AC motor
Motor Power	KDS 5kW
<b>PERFORMANCE</b>	
Seating Capacity	4
Overall Quality(with battery)	≤1278.68(lb)
Maximum speed(MPH)	25
Climbing Gradient	30% unloaded; 25% fully loaded
range (18.64mi/h on flat roads)	50-65
Minimum turning radius (Foot)	10.5
Braking distance (Foot)	<16.4
<b>SUMP</b>	
Front Suspension	Double swing arm independent front suspension
Rear Suspension	Trailing arm non-independent suspension
Rear Axle Ratio	14.2:1
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking
Steering System	Bidirectional rack and pinion steering system
Tire Type	All Terrain Tire
Tire Size	12-inch
Wheel Material	Aluminum alloy
Frame	High-strength sheet metal trapezoidal frame;
<b>BODY</b>	
Body & Finish	Front cover, seat bucket, body,rear end injection moulded one-piece body covering parts
Avaiable Body Colors	Metallic paint (colors can be ordered)
Avaiable Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown



# K Series



G-H2P



R-H2P



A-C4P

## DIMENSIONS

Overall Length(inch)	96.85	123.82
Overall Width(inch)	52.76	46.26
Overall Height(inch)	79.92	72.83
Wheel Base(inch)	66.14	96.06
Front Wheel Track(inch)	39.96	34.84
Rear Wheel Track(inch)	42.32	38.58
Ground Clearance(inch)	6.69	4.72

## POWER

Battery Type	lithium iron phosphate battery	Maintenance-free deep cycle lead-acid batteries 8V*6pcs 48V
Battery Capacity	48V100Ah	
Battery Options	48V150Ah/48V200Ah/72V100Ah/72V150Ah/Lead Acid Battery 48V150Ah	lithium iron phosphate battery
Charger	Wide voltage platform 110V/220V universal	48V25A
DC-DC	300W	48V/12V300W
Motor Type	AC motor	AC asynchronous
Motor Power	KDS 5kW	5kW

## PERFORMANCE

Seating Capacity	2	4
Overall Quality(with battery)	≤1146.4(lb)	≤1322.77(lb)
Maximum speed(MPH)	20	25
Climbing Gradient	30% unloaded; 25% fully loaded	30%
range (18.64mi/h on flat roads)	50-60	43.5-55.92
Minimum turning radius (Foot)	10.33	13.78
Braking distance (Foot)	<11.48	<11.48


## SUMP

Front Suspension	Double swing arm independent front suspension	MacPherson independent suspension
Rear Suspension	Trailing arm non-independent suspension	Leaf spring type non-independent suspension
Rear Axle Ratio	14.2: 1	12.3:1
Brake System	4-wheel hydraulic brakes+electromagnetic brakes for parking	Mechanical brake + electromagnetic brake
Steering System	Bidirectional rack and pinion steering system	Bidirectional rack and pinion steering
Tire Type	All Terrain Tire	Grass tire
Tire Size	12-inch	8-inch
Wheel Material	Aluminum alloy	Aluminum alloy
Frame	High-strength sheet metal trapezoidal frame;	High-strength steel structural parts, electrophoretic surface treatment process

## BODY

Body & Finish	Front cover, seat bucket, body, rear end injection moulded	Injection molding plus automotive paint
Available Body Colors	Metallic paint (colors can be ordered)	Metallic paint (colors can be ordered)
Available Seat Colors	Standard KK model dark brown (without headrest), wrap color dark brown	Standard beige (without headrest)

## Common Colors

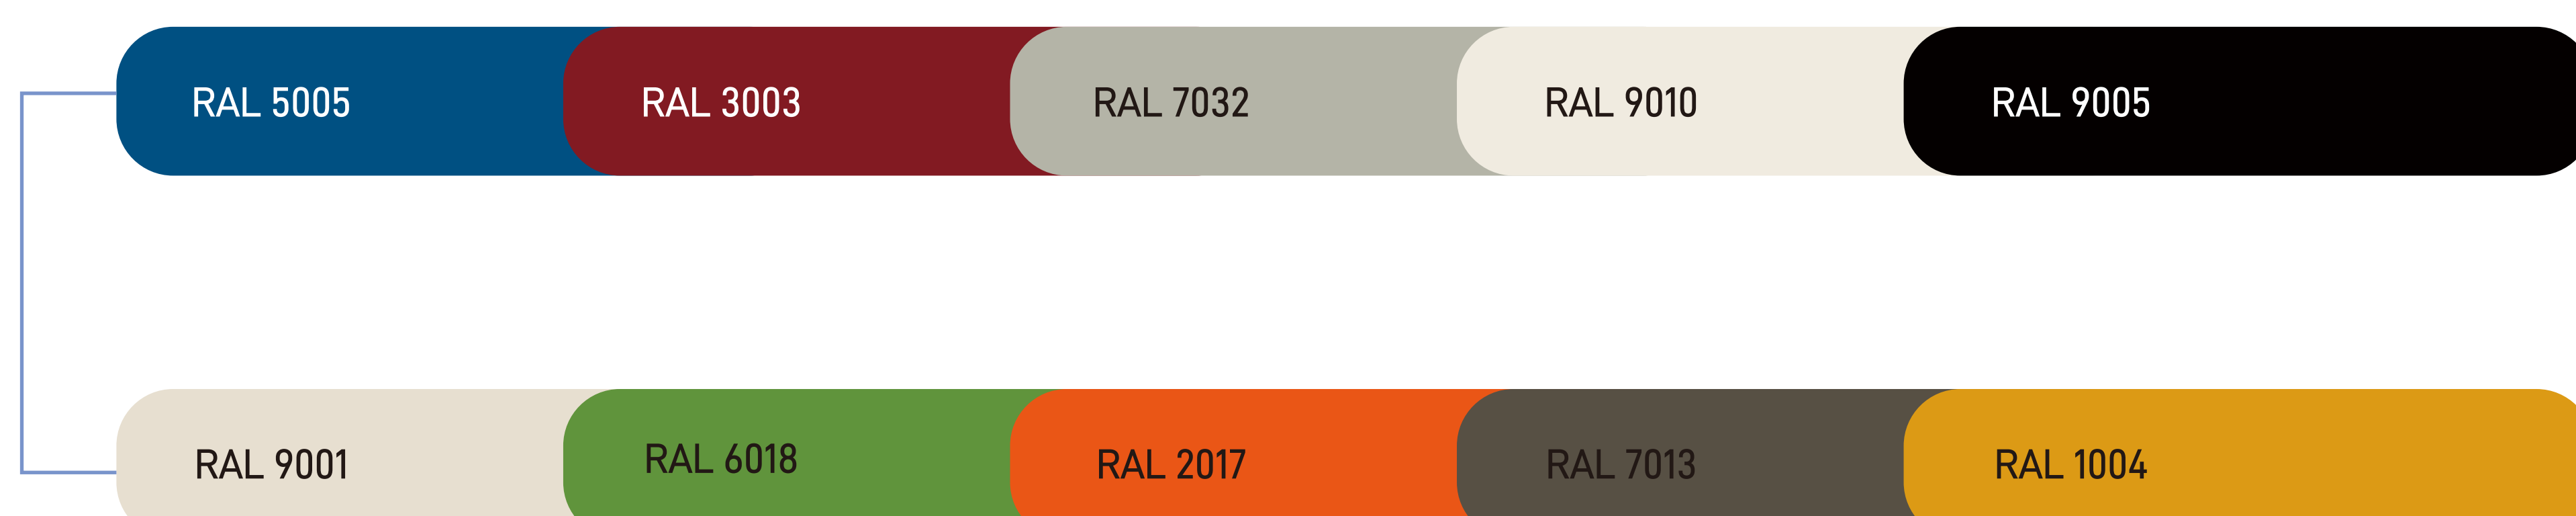

# Add Accessories



Golf Cart Cover Bag



Rain Curtain



Roof Rack



Multi-function tool holder



Five-Grid Rearview Mirror



Golf Cart Cover Bag



Steps for getting on and off the vehicle (iron)



Reversing Mirror with Turn Signal



Getting on and off footrest (iron) single unit



Rear Storage Basket Assembly



Spotlight



Refrigerator No. 4



Plastic Cargo Box



Aluminum Alloy Cargo Box



Ball Washer



Sand Bottle



Bumper



Front storage box

# Function Upgrade



Ceiling Atmosphere Lighting



Roof off-road Spotlights



Golf Cart Cover Bag



Square Soundbar



one button start



Steering Wheel Style Change



Rotary Switches



Windshield Wipers



Snail Trumpet



Dashboard speakers

# Function Upgrade



transfer printing instrument panel (without leather grain)




Flip Seat



Water transfer printing instrument panel (with leather grain)



Dark Brown Flip Glass

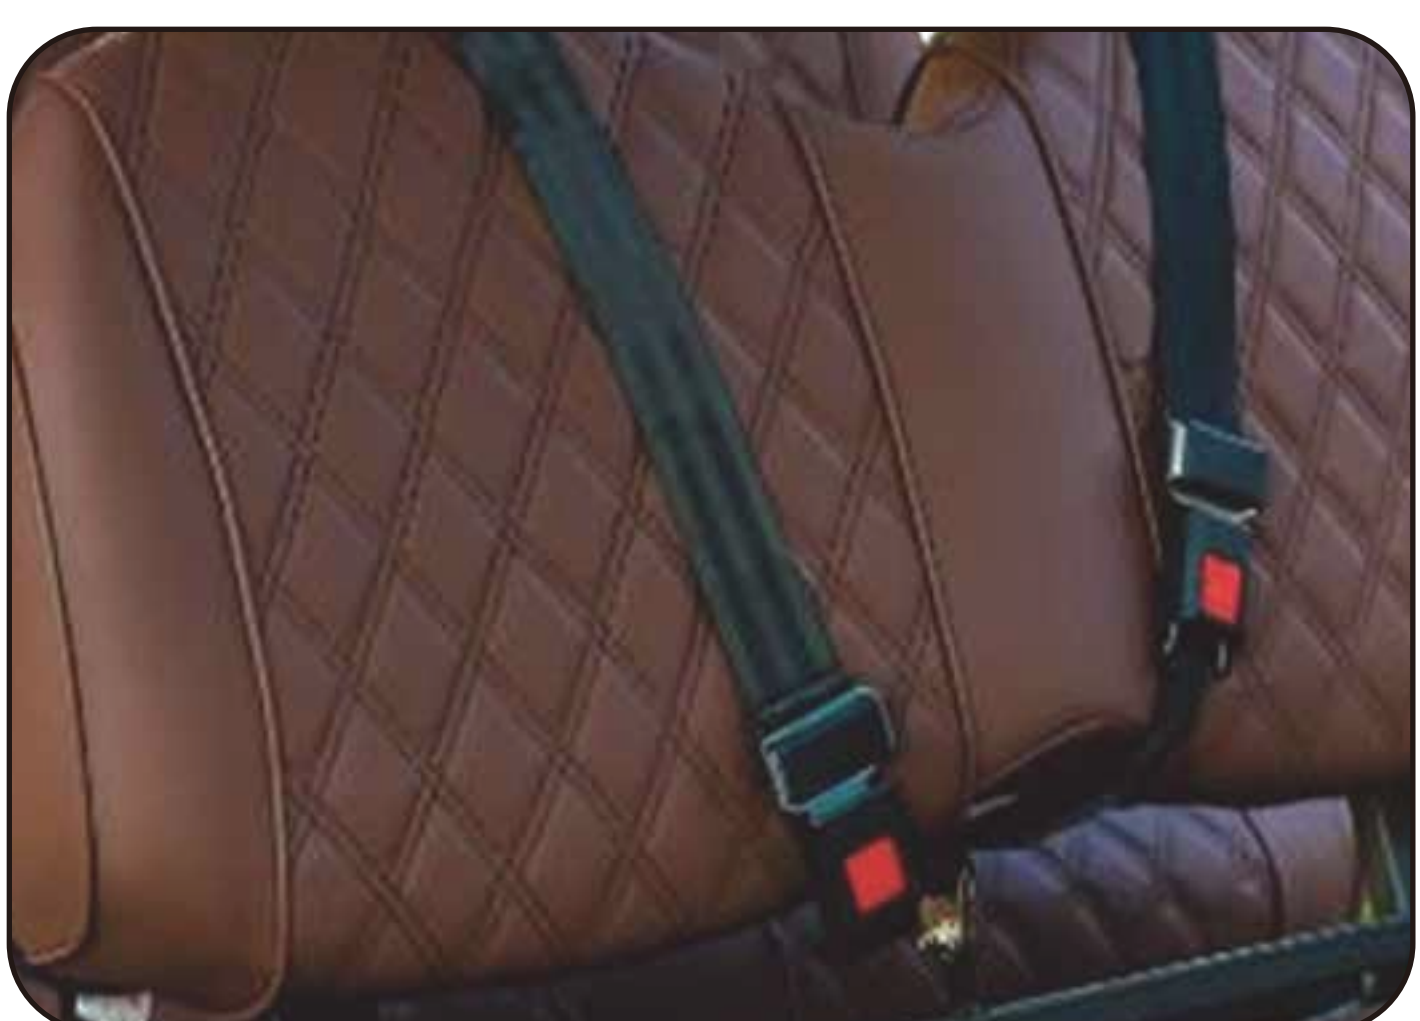


3-Point Seat Belt



Steering Wheel with Integral Clip



# Real Scene Diagram

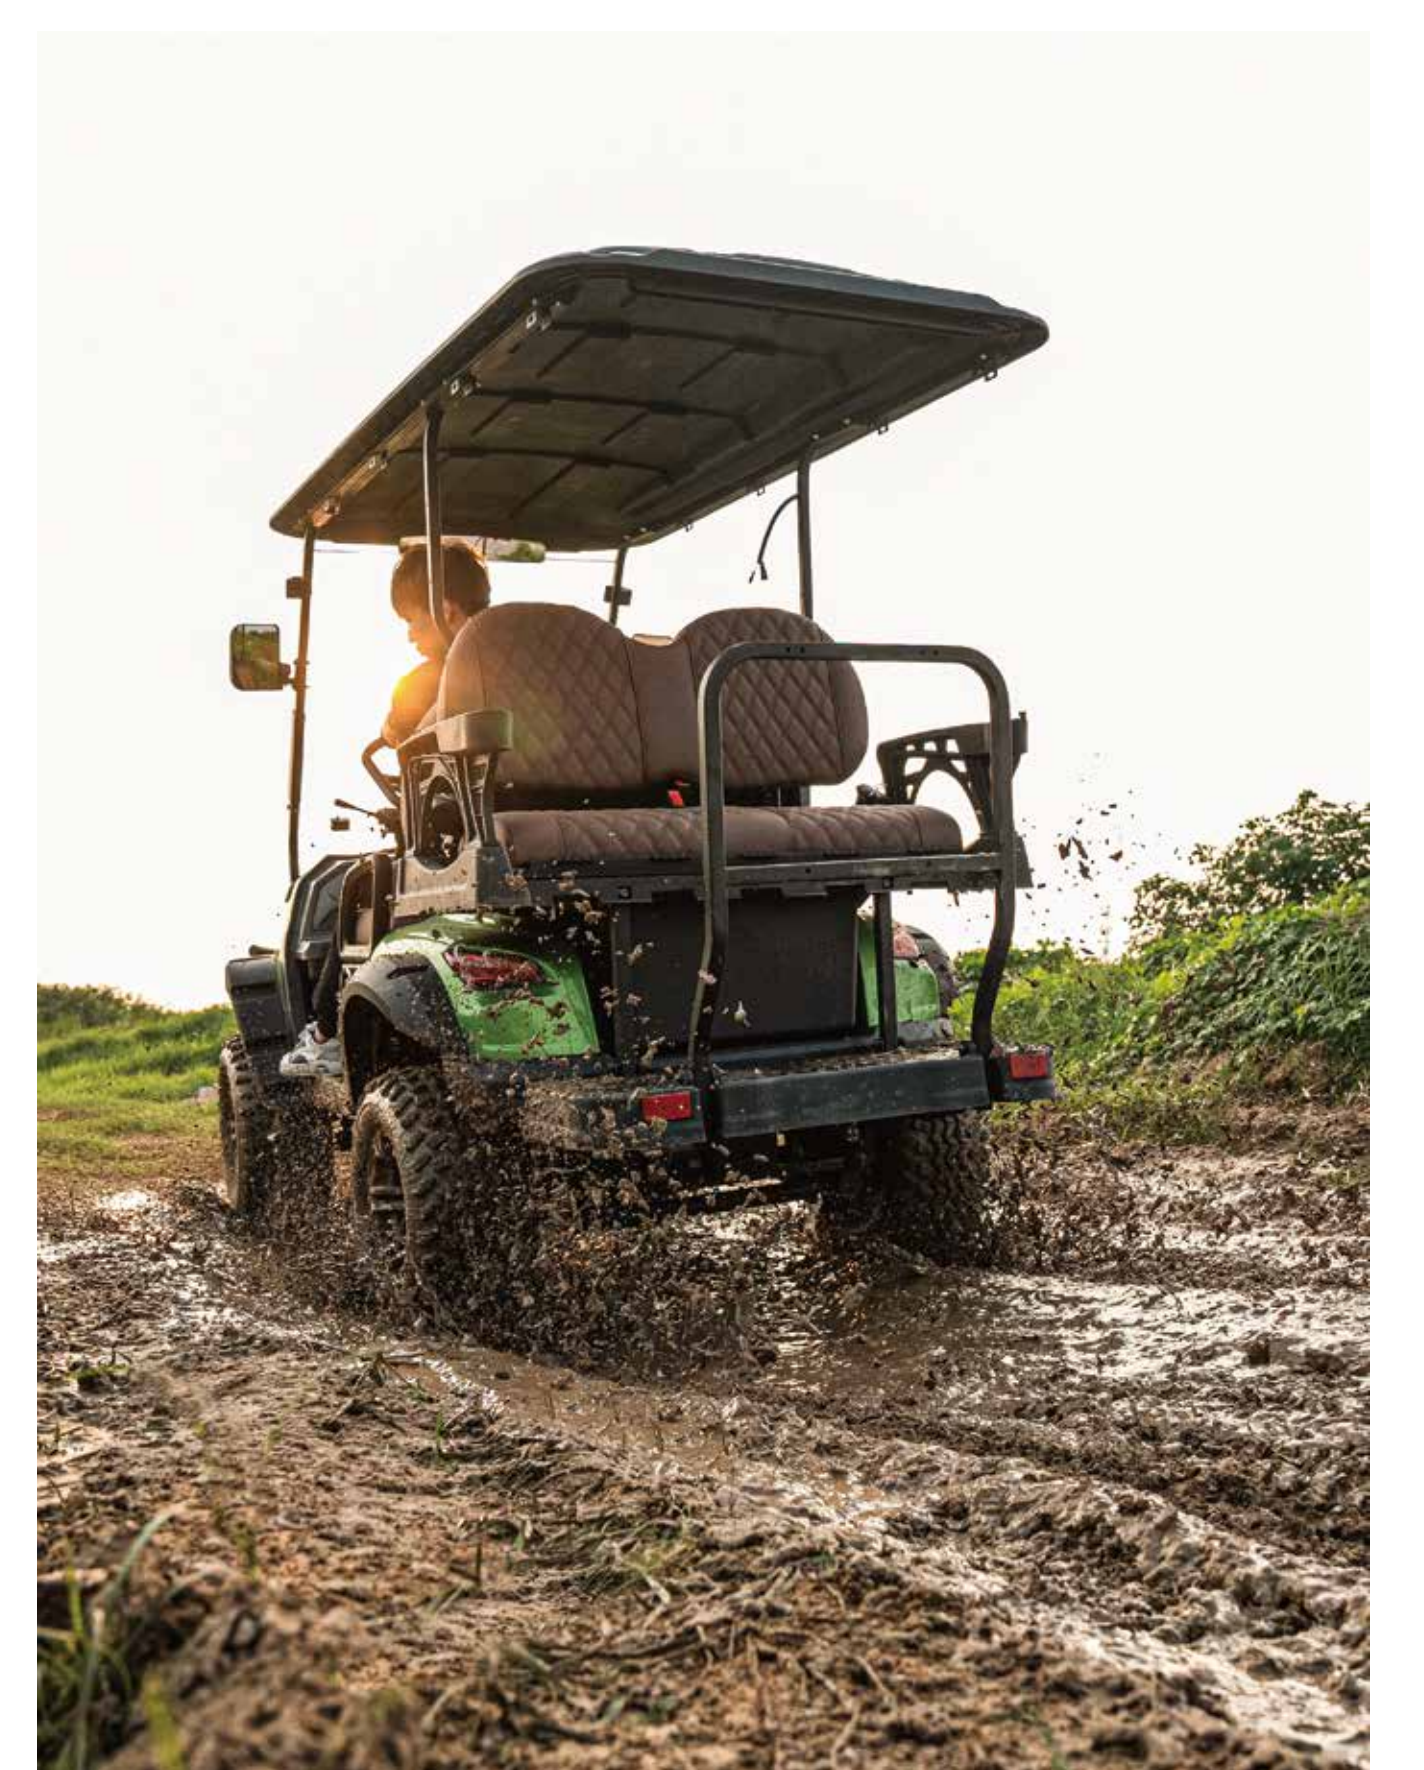

# Real Scene Diagram



# Customer Visits

